## **DATASHEET - T0-6-8362/E**



Changeoverswitches, Contacts: 12, 20 A, front plate: 1-0-2, 60 °, maintained, flush mounting



Part no. T0-6-8362/E Catalog No. 015737

Similar to illustration

Delivery program			
Product range			Control switches
Part group reference			TO
Basic function			Changeoverswitches
			with black thumb grip and front plate
Contacts			12
Degree of Protection			Front IP65
Design			flush mounting
Contact sequence			1 0 2 1 0 2 3 0 X 5 0 X 7 0 X 9 0 X 11 0 12 0 11 0 12 0 11 0 12 0 11 0 12 0 11 0 12 0 11 0 12 0 11 0 12 0 11 0 12 0 11 0 12 0 12 0 X 13 0 X 14 0 X 15 0 X 17 0 X 18 0 X 19 0 X 21 0 X 21 0 X 22 0 X 23 0 X 24 0 X
Switching angle		0	60
Switching performance			maintained With 0 (Off) position
Front plate no.			FS 684
front plate			1-0-2
Motor rating AC-23A, 50 - 60 Hz			
400 V	P	kW	5.5
Rated uninterrupted current	I <sub>u</sub>	Α	20

Note on rated uninterrupted current !u		Rated uninterrupted current $\mathbf{I}_{\mathbf{u}}$ is specified for max. cross-section.
Number of contact units	contact unit(s)	6

### **Technical data**

•					ı
	ο	n	ο	ro	п

Standards			IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL Switch-disconnector according to IEC/EN 60947-3
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature			
Open		°C	-25 - +50
Enclosed		°C	-25 - +40
Overvoltage category/pollution degree			III/3
Rated impulse withstand voltage	$U_{imp}$	V AC	6000
Mechanical shock resistance		g	15
Mounting position			As required
Contacts			

Electrical characteristics			
Rated operational voltage	U <sub>e</sub>	V AC	690
Rated uninterrupted current	I <sub>u</sub>	Α	20
Note on rated uninterrupted current !u			Rated uninterrupted current $\mathbf{I}_{\mathbf{U}}$ is specified for max. cross-section.
Load rating with intermittent operation, class 12			
AB 25 % DF		x I <sub>e</sub>	2
AB 40 % DF		x I <sub>e</sub>	1.6
AB 60 % DF		x I <sub>e</sub>	1.3
Short-circuit rating			
Fuse		A gG/gL	20
Rated short-time withstand current (1 s current)	I <sub>cw</sub>	$A_{rms}$	320
Note on rated short-time withstand current lcw			Current for a time of 1 second
Rated conditional short-circuit current	$I_q$	kA	6

Rated conditional short-circuit current	Iq	KA	b
Switching capacity			
cos φ rated making capacity as per IEC 60947-3		Α	130
Rated breaking capacity cos φ to IEC 60947-3		Α	
230 V		Α	100
400/415 V		Α	110
500 V		Α	80
690 V		Α	60
Safe isolation to EN 61140			
between the contacts		V AC	440
Current heat loss per contact at $I_{\rm e}$		W	0.6
Current heat loss per auxiliary circuit at $I_{\rm e}$ (AC-15/230 V)		CO	0.6
Lifespan, mechanical	Operations	x 10 <sup>6</sup>	> 0.4
Maximum operating frequency	Operations/h		1200
AC			
AC-3			
Rating, motor load switch	P	kW	
220 V 230 V	P	kW	3
230 V Star-delta	P	kW	5.5
400 V 415 V	P	kW	5.5
400 V Star-delta	P	kW	7.5
500 V	P	kW	5.5
500 V Star-delta	P	kW	7.5
690 V	P	kW	4
690 V Star-delta	P	kW	5.5
Rated operational current motor load switch			

99914			
230 V	l <sub>e</sub>	Α	11.5
230 V star-delta	l <sub>e</sub>	Α	20
400V 415 V	l <sub>e</sub>	Α	11.5
400 V star-delta	l <sub>e</sub>	Α	20
500 V	l <sub>e</sub>	Α	9
500 V star-delta	le	Α	15.6
690 V	l <sub>e</sub>	Α	4.9
690 V star-delta	l <sub>e</sub>	Α	8.5
AC-21A			
Rated operational current switch			
440 V	l <sub>e</sub>	Α	20
AC-23A			
Motor rating AC-23A, 50 - 60 Hz	Р	kW	
230 V	Р	kW	3
400 V 415 V	Р	kW	5.5
500 V	Р	kW	7.5
690 V	P	kW	5.5
Rated operational current motor load switch			
230 V	I <sub>e</sub>	Α	13.3
400 V 415 V	I <sub>e</sub>	Α	13.3
500 V	l <sub>e</sub>	Α	13.3
690 V	I <sub>e</sub>	Α	7.6
DC			
DC-1, Load-break switches L/R = 1 ms			
Rated operational current	I <sub>e</sub>	Α	10
Voltage per contact pair in series		V	60
DC-21A	le	Α	
Rated operational current	I <sub>e</sub>	Α	1
Contacts		Quantity	1
DC-23A, motor load switch L/R = 15 ms			
24 V			
Rated operational current	I <sub>e</sub>	Α	10
Contacts		Quantity	1
48 V			
Rated operational current	I <sub>e</sub>	Α	10
Contacts		Quantity	2
60 V			
Rated operational current	I <sub>e</sub>	Α	10
Contacts		Quantity	3
120 V			
Rated operational current	I <sub>e</sub>	Α	5
Contacts		Quantity	3
240 V			
Rated operational current	I <sub>e</sub>	Α	5
Contacts		Quantity	5
DC-13, Control switches L/R = 50 ms			
Rated operational current	I <sub>e</sub>	Α	10
Voltage per contact pair in series		V	32
Control circuit reliability at 24 V DC, 10 mA	Fault probability	H <sub>F</sub>	$< 10^{-5}, < 1$ fault in 100000 operations
Terminal capacities			
Solid or stranded		mm <sup>2</sup>	1 x (1 - 2,5) 2 x (1 - 2,5)
Flexible with ferrules to DIN 46228		mm <sup>2</sup>	1 x (0.75 - 2.5)
			2 x (0.75 - 2.5)

Terminal screw			M3.5
Tightening torque for terminal screw		Nm	1
Technical safety parameters:			
Notes			B10 <sub>d</sub> values as per EN ISO 13849-1, table C1
Rating data for approved types			
Contacts			
Rated operational voltage	U <sub>e</sub>	V AC	600
Rated uninterrupted current max.			
Main conducting paths			
General use		Α	16
Auxiliary contacts			
General Use	I <sub>U</sub>	Α	10
Pilot Duty			A 600 P 600
Switching capacity			
Maximum motor rating			
Single-phase			
120 V AC		HP	0.5
200 V AC		HP	1
240 V AC		HP	1.5
Three-phase			
200 V AC		HP	3
240 V AC		HP	3
480 V AC		HP	7.5
600 V AC		HP	7.5
Short Circuit Current Rating		SCCR	
Basic Rating		kA	5
max. Fuse		Α	50
High fault rating		kA	10
max. Fuse		Α	20, Class J
Terminal capacity			
Solid or flexible conductor with ferrule		AWG	18 - 14
Terminal screw			M3.5
Tightening torque		lb-in	8.8

## **Design verification as per IEC/EN 61439**

besign vermoundings per indicated in 100			
Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	20
Heat dissipation per pole, current-dependent	$P_{\text{vid}}$	W	0.6
Equipment heat dissipation, current-dependent	$P_{\text{vid}}$	W	0
Static heat dissipation, non-current-dependent	$P_{vs}$	W	0
Heat dissipation capacity	P <sub>diss</sub>	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	50
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			UV resistance only in connection with protective shield.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.

10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9 Insulation properties	
10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

#### **Technical data ETIM 7.0**

Low-voltage industrial components (EG000017) / Off-load switch (EC001105)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Changeover switch (ecl@ss10.0.1-27-37-14-05 [AKF062013])

Number of poles 6 With 0 (off) position Yes	
With retraction in 0-position	
Rated permanent current lu A 20	
Rated operation current le at AC-3, 400 V A 11.5	
Rated operation power at AC-3, 400 V kW 4	
Degree of protection (IP), front side	
Degree of protection (NEMA), front side	
Number of auxiliary contacts as normally closed contact	
Number of auxiliary contacts as normally open contact	
Number of auxiliary contacts as change-over contact	
Suitable for ground mounting No	
Suitable for front mounting 4-hole	
Suitable for distribution board installation No	
Suitable for intermediate mounting No	
Complete device in housing No	
Material housing Plastic	
Type of control element Toggle	
Type of electrical connection of main circuit Screw connection	

## **Approvals**

Product Standards	UL 60947-4-1;CSA - C22.2 No. 60947-4-1-14; CSA-C22.2 No. 94; IEC/EN 60947-3; CE marking
UL File No.	E36332
UL Category Control No.	NLRV
CSA File No.	12528
CSA Class No.	3211-05
North America Certification	UL listed, CSA certified
Specially designed for North America	Yes, with an alternative front plate and/or terminal markings to those of the IEC type in combination with "+NA" (105864)
Suitable for	Branch circuits, suitable as motor disconnect
Degree of Protection	IEC: IP65; UL/CSA Type 1, 12

## **Dimensions**

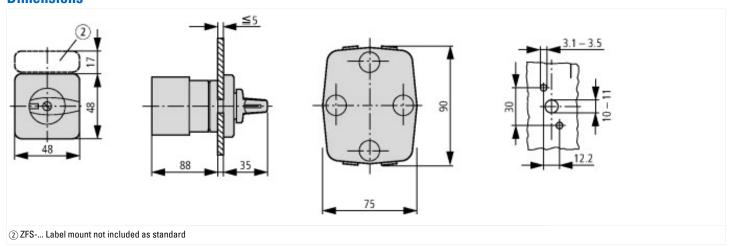

# **Additional product information (links)**

IL03801020Z (AWA1150-0586) Cam switches: flush mounting	
IL03801020Z (AWA1150-0586) Cam switches: flush mounting	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03801020Z2018_05.pdf
Display flip catalog page.	http://ecat.moeller.net/flip-cat/?edition=K115A&startpage=44
Technical overview cam switch, switch-disconnector	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.2
System overview cam switch T	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.4
System overview switch-disconnector P	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.6
Key to part numbers Cam switch	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.8
Key to part numbers Switch-disconnector	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.8
Switches for ATEX	http://www.coopercrouse-hinds.eu/en/products/25-ex-safety-and-main-current-switches.html
Ordering form for SOND switches and SOND front plates(DE_EN)	ftp://ftp.moeller.net/DOCUMENTATION/PDF/MZ008005ZU_Orderform_Customized_Switch.pdf
Ordering form for SOND switches and SOND front plates(DE_EN)	ftp://ftp.moeller.net/DOCUMENTATION/PDF/MZ008006ZU_Orderform_Customized_Switch.pdf