

Part no.	STN0,16(230/230)
Catalog No.	204945
Eaton Catalog No.	STNP16-G2-G2



Product range			Single-phase control transformers ST...
Basic function			Single-phase STN control transformers
Rated output voltage		V	230
Rated power		kVA	0.16
Terminal diagram / contact assignment			
Cu factor 0,38			

Characteristics

Separate windings		☒
-------------------	--	----------------------------------

Note			The following applies for the no-load loss, short-circuit loss (copper losses), short-circuit voltage and efficiency values: all details relate to a temperature of 20 °C
No-load losses		W	11
Short-circuit losses		W	16


Technical data for design verification				
Rated operational current for specified heat dissipation	I_n	A	0	
Heat dissipation per pole, current-dependent	P_{vid}	W	0	
Equipment heat dissipation, current-dependent	P_{vid}	W	0	
Static heat dissipation, non-current-dependent	P_{vs}	W	27	
Heat dissipation capacity	P_{diss}	W	0	
IEC/EN 61439 design verification				
10.2 Strength of materials and parts				
10.2.2 Corrosion resistance				Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures				Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat				Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects				Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation				Meets the product standard's requirements.
10.2.5 Lifting				Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact				Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions				Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES				Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances				Meets the product standard's requirements.
10.5 Protection against electric shock				Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components				Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections				Is the panel builder's responsibility.
10.8 Connections for external conductors				Is the panel builder's responsibility.
10.9 Insulation properties				
10.9.2 Power-frequency electric strength				Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage				Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material				Is the panel builder's responsibility.
10.10 Temperature rise				The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.

10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / One-phase control transformer (EC002486)			
Electric engineering, automation, process control engineering / Transformer, converter, coil / Control transformer / One-phase control transformer (ec1@ss10.0.1-27-03-13-02 [AAB620015])			
Built as safety transformer			No
Built as isolating transformer			No
Built as energy saving transformer			No
Primary voltage 1		V	230 - 230
Primary voltage 2		V	0 - 0
Primary voltage 3		V	0 - 0
Primary voltage 4		V	0 - 0
Primary voltage 5		V	0 - 0
Primary voltage 6		V	0 - 0
Primary voltage 7		V	0 - 0
Primary voltage 8		V	0 - 0
Primary voltage 9		V	0 - 0
Primary voltage 10		V	0 - 0
Secondary voltage 1		V	230 - 230
Secondary voltage 2		V	0 - 0
Secondary voltage 3		V	0 - 0
Secondary voltage 4		V	0 - 0
Secondary voltage 5		V	0 - 0
Secondary voltage 6		V	0 - 0
Secondary voltage 7		V	0 - 0
Secondary voltage 8		V	0 - 0
Secondary voltage 9		V	0 - 0
Secondary voltage 10		V	0 - 0
Rated apparent power		VA	100
Type of insulation material acc. IEC 85			B
Short-circuit-proof			No
Relative short circuit voltage		%	6.7
Width		mm	85
Height		mm	103
Depth		mm	97
Degree of protection (IP)			IP00
Ring core			No
Suitable for mounting on PCB			No
Modular version			No
Conductor material			Copper

Dimensions

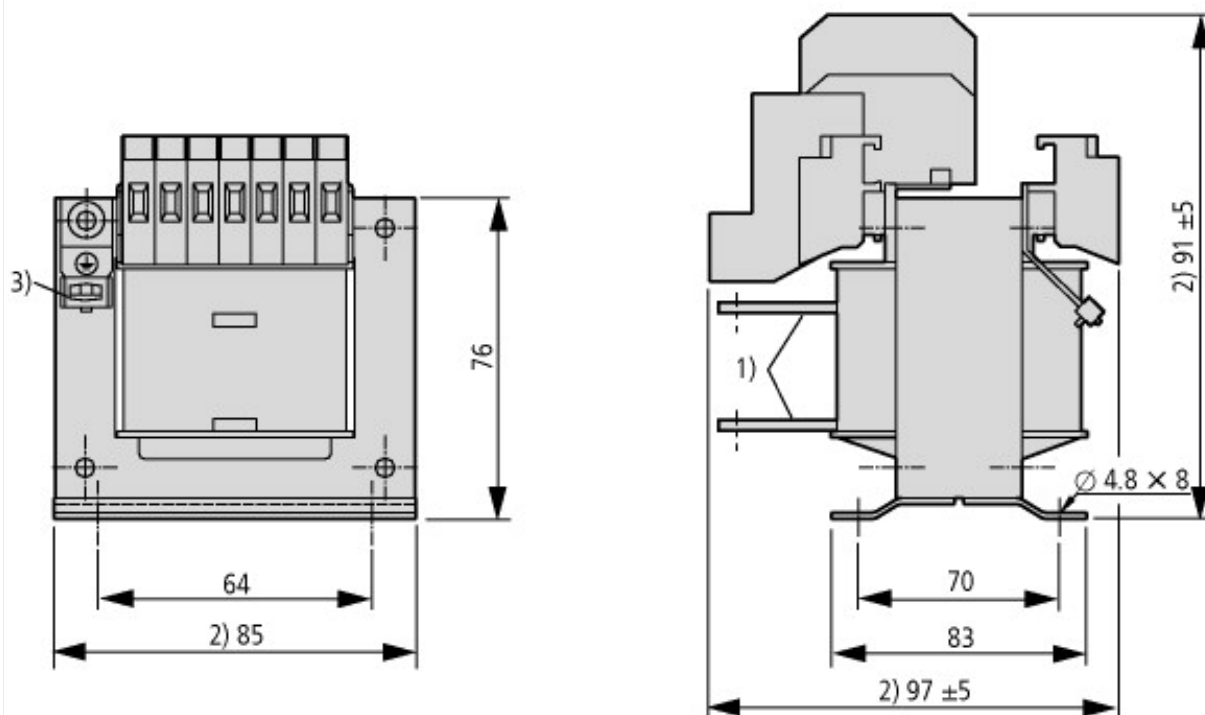

- ① Connection lugs
- ② Maximum space requirement
- ③ with STN0,06-02 ground connection at bottom