



Timing relay, 1W, 0.05s-100h, 24-240V50/60Hz, 24-240VDC, on-delayed

Part no. ETR4-11-A
Catalog No. 031882
Eaton Catalog No. XTTR6A100HS11B
EL-Nummer 0004133307
(Norway)

Powering Business Worldwide™

Delivery program

Product range	ETR4 timing relays		
Basic function	Timer relays		
Function	On-delayed		
	Fixed timing function		
Number of changeover contacts	1		
Time range	0.05 s - 100 h		
Time range	0.05 - 1 s 0.15 - 3 s 0.5 - 10 s 1.5 - 30 s 5 - 100 s 15 - 300 s 1.5 - 30 min 15 - 300 min 1.5 - 30 h 5 - 100 h		
Rated operational current			
AC-14			
300 V	I_{e}	A	3
380 V 400 V 415 V	I_{e}	A	3
	Value applies starting with release 001.		
AC-15			
220 V 230 V 240 V	I_{e}	A	3
300 V	I_{e}	A	3
380 V 400 V 415 V	I_{e}	A	3
	Value applies starting with release 001.		
Voltage range	U_{LN}	V	24 - 240 V AC, 50/60 Hz 24 - 240 V DC
Width			mm 22.5
Terminal marking according to EN 50042			

Technical data

General

Standards			Standard IEC/EN 61812 VDE 0435
Lifespan, mechanical			
AC operated	Operations	$\times 10^6$	30
DC operated	Operations	$\times 10^6$	30
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature			
Ambient temperature, storage		°C	- 45 - + 85
Open		°C	- 25 - + 60
Enclosed		°C	- 25 - + 45
Mounting position			As required
Mechanical shock resistance (IEC/EN 60068-2-27)			

Half-sinusoidal shock, 20 ms	g	
Make contact	g	4
Degree of protection		
Terminals		IP20
Weight	kg	0.1
Terminal capacities	mm ²	
Solid	mm ²	1 x (0.5 - 2.5) 2 x (0.5 - 1.5)
Flexible with ferrule	mm ²	1 x (0.5 - 2.5) 2 x (0.5 - 1.5)
Solid or stranded	AWG	1 x (20 - 14)

Contacts

Rated impulse withstand voltage	U _{imp}	V AC	4000
Rated impulse withstand voltage	U _{imp}	V AC	6000
			Value applies starting with release 001.
Overvoltage category/pollution degree			III/2
Rated insulation voltage	U _i	V AC	400
Rated insulation voltage	U _i	V AC	600
			Value applies starting with release 001.
Rated operational voltage	U _e	V AC	300
Rated operational voltage	U _e	V AC	440
			Value applies starting with release 001.
Safe isolation to EN 61140			
between coil and auxiliary contacts		V AC	250
between the auxiliary contacts		V AC	250
Making capacity			
AC-14 cos φ = 0.3 400 V		A	48
AC-15 cos φ = 0.3 220 V		A	50
DC-11 L/R - 40 ms		x I _e	1.1
Breaking capacity			
AC-14 cos φ = 0.3 440 V		A	3
AC-15 cos φ = 0.3 220 V		A	3
DC-11 L/R - 40 ms		x I _e	1.1
Rated operational current	I _e	A	
AC-14	I _e		
380 V 400 V 415 V	I _e	A	3
			Value applies starting with release 001.
AC-14			
440 V	I _e	A	3
AC-15			
220 V 230 V 240 V	I _e	A	3
DC-11			
Note			Making and breaking conditions to DC13, time constant as stated
L/R max. 15 ms		A	
24 V	I _e	A	1.5
L/R max. 50 ms		A	1.2
Conv. thermal current	I _{th}	A	6
Short-circuit rating without welding			
Note			When supplied directly from mains or transformer > 1000 VA
Max. fuse, make contacts		A gG/gL	6
Max. fuse, break contacts		A gG/gL	6
Max. overcurrent protective device, 220/230 V		Type	FAZ-B4/1-HI

Magnet systems

Rated operational voltage	U _e	V	
AC			24 - 240

DC			24 - 240
Rated frequency AC	Hz	47 - 63	
Tolerance AC operated min.	$\times U_c$	0.85	
Tolerance AC operated max.	$\times U_c$	1.1	
Tolerance DC operated min.	$\times U_c$	0.7	
Tolerance DC operated max.	$\times U_c$	1.1	
Power consumption			
Pick-up AC	VA	2	
Sealing AC	VA	2	
Pick-up DC	W	1.8	
Sealing DC	W	1.8	
Duty factor	% DF	100	
Maximum operating frequency	Ops/h	4000	
Minimum command time			
AC	ms	50	
DC	ms	30	
Repetition accuracy (deviation)	%	≤ 0.5	
Recovery time (after 100% time delay)	ms	70	
Contact changeover time	t_u	ms	4

Electromagnetic compatibility (EMC)

Electrostatic discharge (ESD)			
applied standard			IEC/EN 61000-4-2
Air discharge	kV	8	
Contact discharge	kV	6	
Electromagnetic fields (RFI)			
applied standard			IEC/EN 61000-4-3
	V/m	80 - 1000 MHz: 10 1.4 - 2 GHz: 3 2.0 - 2.7 GHz: 1	
Radio interference suppression			EN 55011, Class B (conducted) EN 55011, Class B (radiated)
Burst	kV	Supply cables: 2 Signal cables: 1 according to IEC/EN 61000-4-4	
power pulses (Surge)		2 kV (symmetrical) 4 kV (asymmetrical) according to IEC/EN 61000-4-5	
Immunity to line-conducted interference to (IEC/EN 61000-4-6)	V	10	

Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I_n	A	6
Heat dissipation per pole, current-dependent	P_{vid}	W	1.4
Equipment heat dissipation, current-dependent	P_{vid}	W	0
Static heat dissipation, non-current-dependent	P_{vs}	W	1.8
Heat dissipation capacity	P_{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	60
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.

10.2.7 Inscriptions	Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9 Insulation properties	
10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Relays (EG000019) / Timer relay (EC001439)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Relay and socket / Timed relay (ecl@ss10.0.1-27-37-16-05 [AKF092013])

Type of electric connection	Screw connection	
Function delay-on energization	Yes	
Function delay on de-energization	No	
Function floating contact on energization	No	
Function floating contact on de-energization	No	
Function star-delta	No	
Function pulse shaping	No	
Function flashing, starting with pause, fixed time	No	
Function flashing, starting with pulse, fixed time	No	
Clock function, starting with pause, variable	No	
Clock function, starting with pulse, variable	No	
With plug-in socket	No	
Remote operation possible	No	
Suitable for remote control	No	
Pluggable on auxiliary contact block	No	
Rated control supply voltage Us at AC 50Hz	V	24 - 240
Rated control supply voltage Us at AC 60Hz	V	24 - 240
Rated control supply voltage Us at DC	V	24 - 240
Voltage type for actuating	AC/DC	
Nominal current	A	3
Time range	s	0.05 - 360000
Number of outputs, undelayed, normally closed contact	0	
Number of outputs, undelayed, normally open contact	0	
Number of outputs, undelayed, change-over contact	0	
Number of outputs, delayed, normally closed contact	0	
Number of outputs, delayed, normally open contact	0	
Number of outputs, delayed, change-over contact	1	
Outputs, reversible delayed/undelayed	No	
With semiconductor output	No	
Suitable for DIN rail (top hat rail) mounting	Yes	
Suitable for front mounting	No	
Width	mm	23
Height	mm	82
Depth	mm	103


Approvals

Product Standards	IEC/EN 61812-1; IEC/EN 60947-5-1; UL 508; CSA-22.2 No. 14; CE marking
UL File No.	E29184
UL Category Control No.	NKCR
CSA File No.	12528
CSA Class No.	3211-03
North America Certification	UL listed, CSA certified
Degree of Protection	IEC: IP20, UL/CSA Type: -

Characteristics

Flow diagram for timing functions

LED legend



Time not running, contact 15 – 18 closed




Time running, contact 15 – 18 closed




Time running, contact 15 – 18 not closed

- ① A2/A1 linked
- ② A2/A1 not linked

11 On-delayed

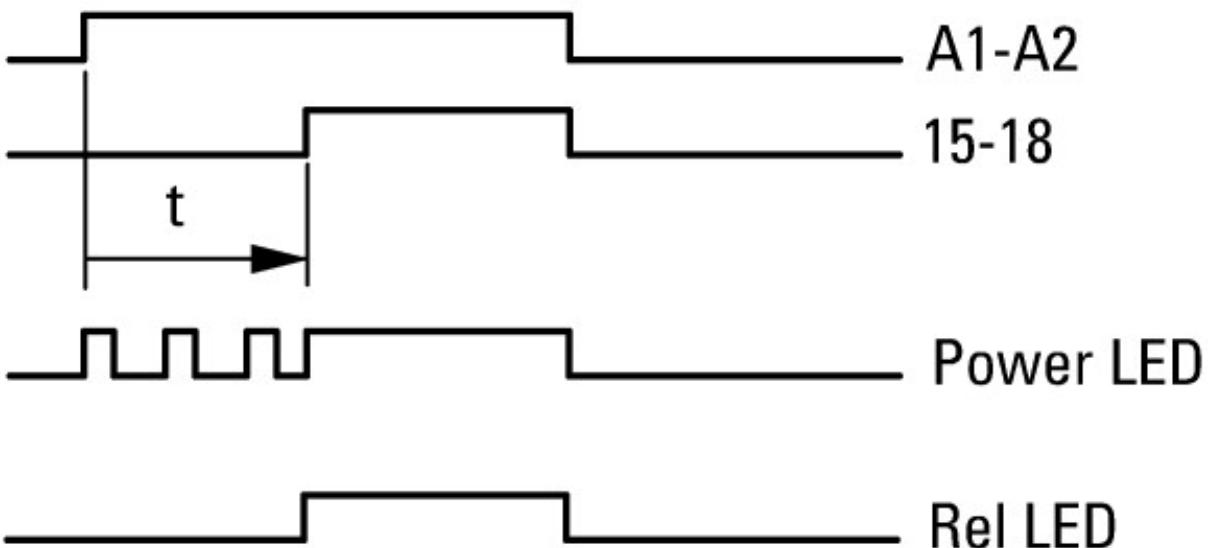

Dimensions

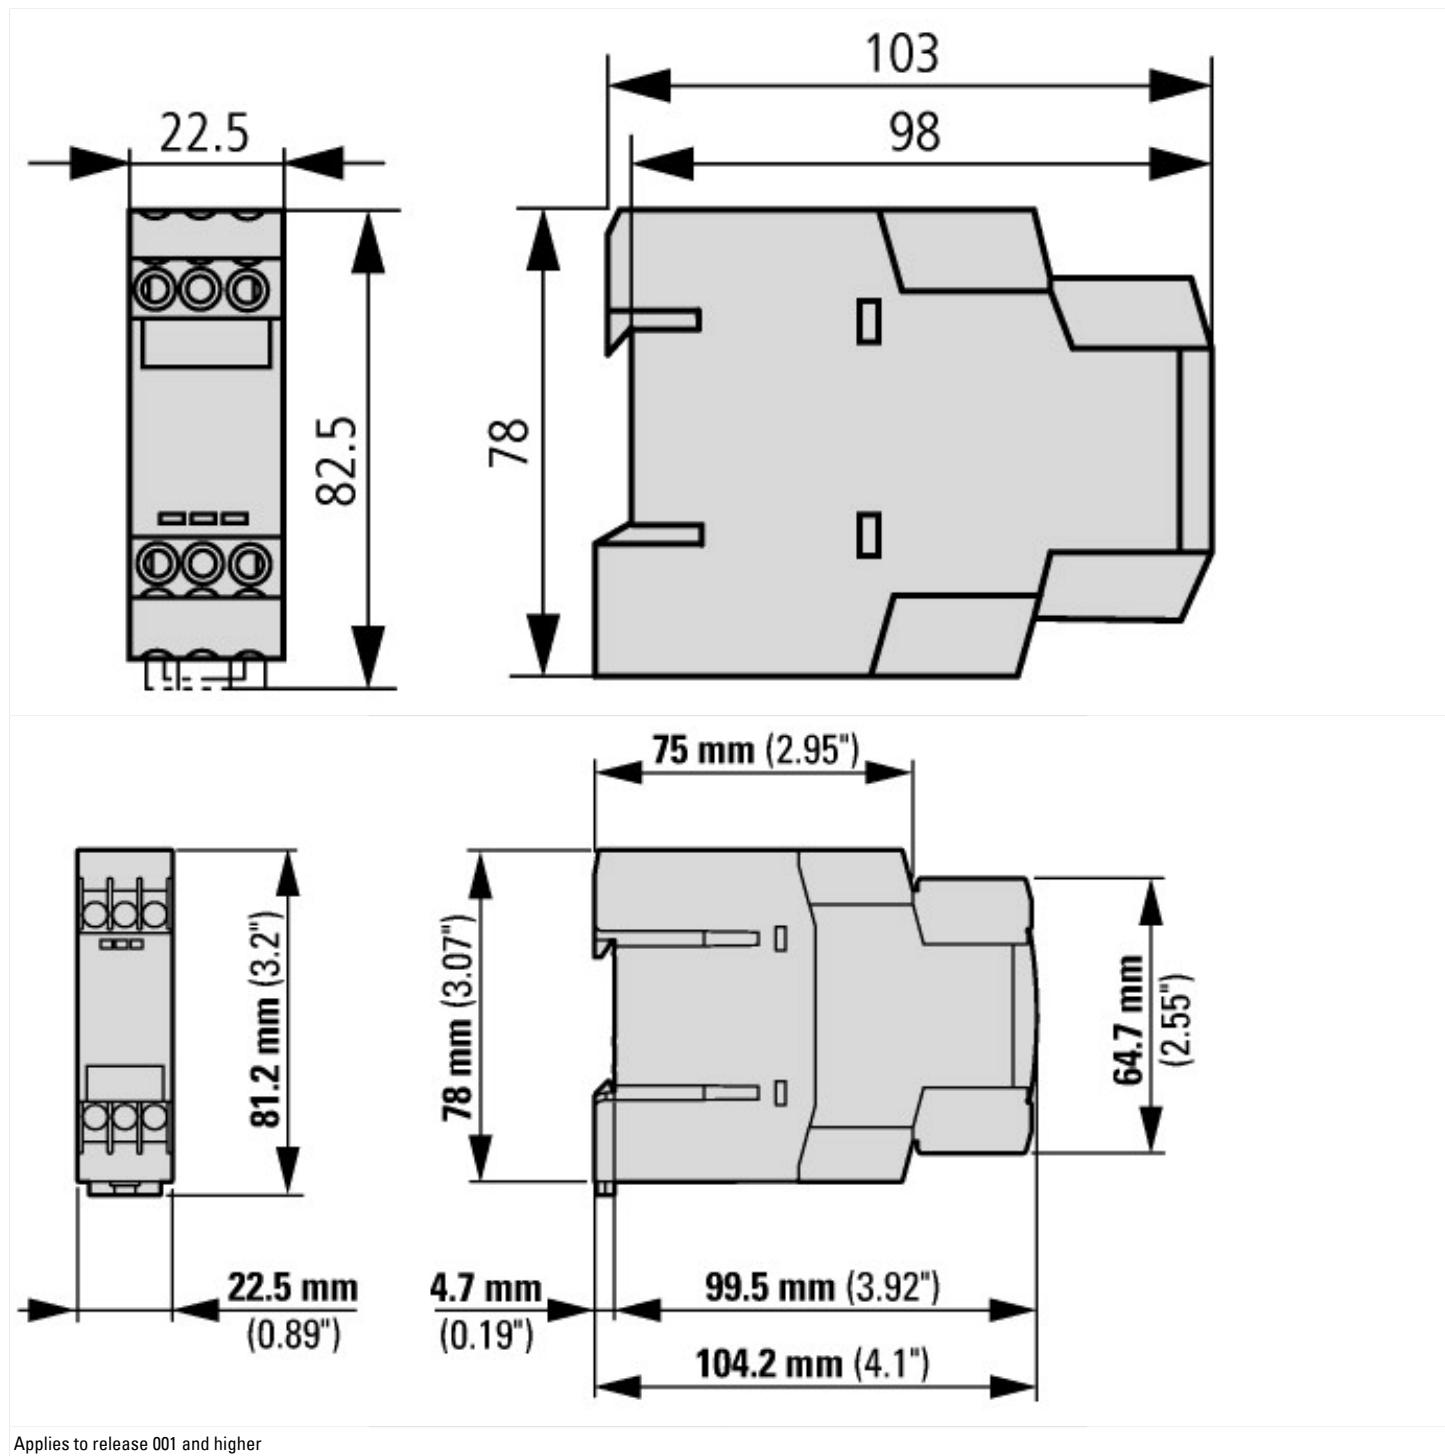

Applies to release 001 and higher

Additional product information (links)

[IL04910001Z \(AWA2527-1485\) Timing relay, star-delta relay, multifunction relay](#)

[IL04910001Z \(AWA2527-1485\) Timing relay, star- delta relay, multifunction relay](http://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL04910001Z2018_05.pdf)