


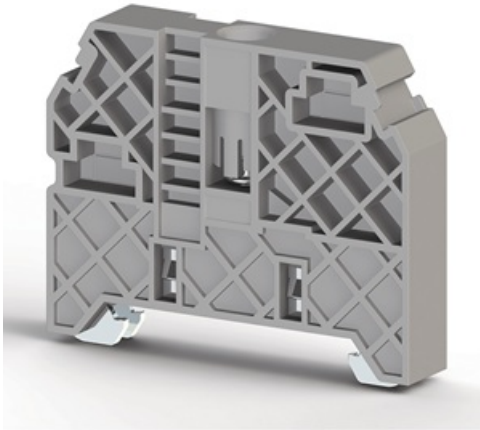

Klemsan®

495219 KD 7

KD 7

General Product Information

Insulating material	PA
Inflammability class acc. to UL 94	V2
Quantity	50
Operation Temperature Min.-Max.	-55 / 120 °C

Dimensions

Width	9,5 mm
Length	52
Height	43,4 / 50,9 mm

Insulated Screwdrivers



- **IKT 3**
(3,5x100mm)-Isolated screwdriver - 3,5x100 mm

Mounting Rails



- **MR 35x15-MR**
35x15, Slotted



- **MR 35x15 (1 m.)**
m.)-MR 35x15 (1 m.) Non-Slotted



- **MR 35x7,5-MR**
35x7,5 - Slotted

Group Markings



- MR 35x7,5 (1 m.)-MR 35x7,5 (1 m.) Non-Slotted



- ME3-KD 7 can be used with stopper , transparent group label.

LATAM - RETIE Sertifikası - LATAM - Retie Certificate

AutoCat File

Order Info

	495210	KD 7
	495219	KD 7