


CV



Indicative image

HIGH TEMPERATURE GLASS OPTICAL FIBRES

- Models with flexible fibre heads (with sleeve)
- Wide range of accessories (AF serie)
- IP67 protection degree
- SSF - FS1 - FX3 - FX4 serie connectable
- Approvals: CE

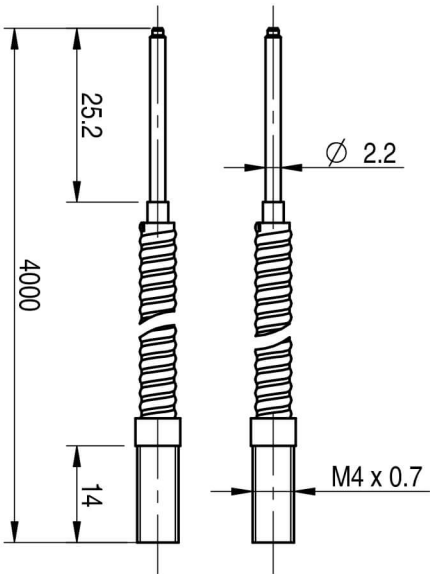

Detection properties

Distance with SSF	90 mm
Distance with FS1	90 mm
Distance with FX3	600 mm
Distance with FX4	900 mm
Distance with F1R	410 mm

Application

Function Principle	Emitter + Receiver
Description	Glass fibres up to 200°C
Optic position	Axial

Mechanical data

Operating temperature	-40°C....+200°C (posa fissa)
1	4
1 mm	1
M4 con sleeve	M4

vetro, ETM, inox

glass, ETM, inox

ottone nichelato

nickel-plated brass

Test/Approvals

Degree of protection

IP67

Accessories

Accessories to be ordered separately

vedi serie AF

Datasensing S.r.l.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail info@datasensing.com

date of printing

12/01/2022 10:37:17