



# AMPLIFIED INDUCTIVE SENSORS

## Ø 30 INCREASED RANGE

10÷30 V DC - 3 WIRES NPN OR PNP OUTPUT


- Range, 15mm to 20mm - shielded, not shielded
- Short housing models
- Cable or M12 quick connect models
- Operation LED




IS Series




### IDENTIFICATION CODE

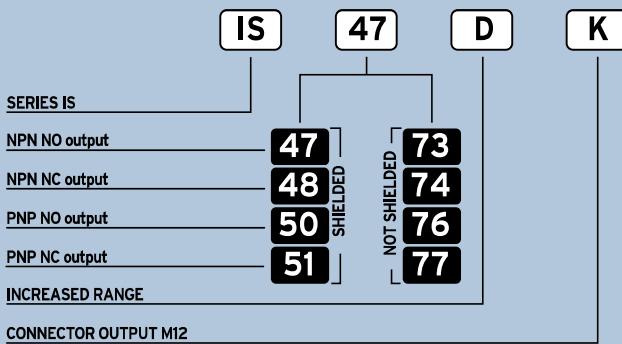

### WIRING DIAGRAMS

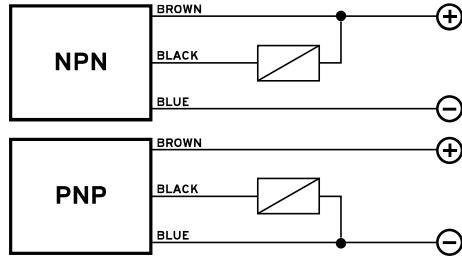

### CONNECTION WITH CONNECTOR M12 (K)




View of quadripole male connector

### CONTACTS CONFIGURATION


Available	Contacts numbers			
	1	2	3	4
(NO or NC)	+		-	NO/NC

### DIMENSIONS (mm)

#### CONFIGURATION WITH CABLE

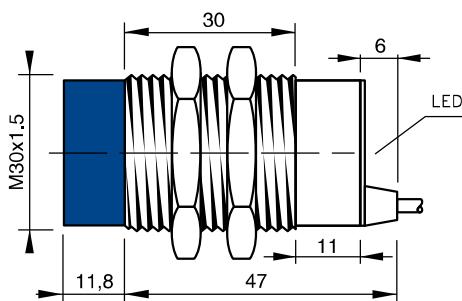

#### CONFIGURATION WITH CONNECTOR K

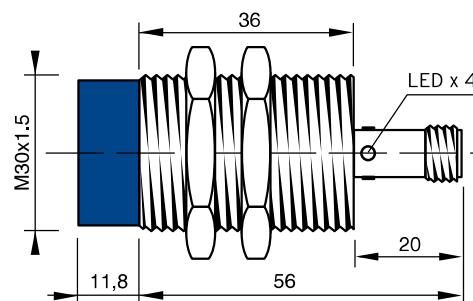

Note: the front part in blue refers to not shielded models