
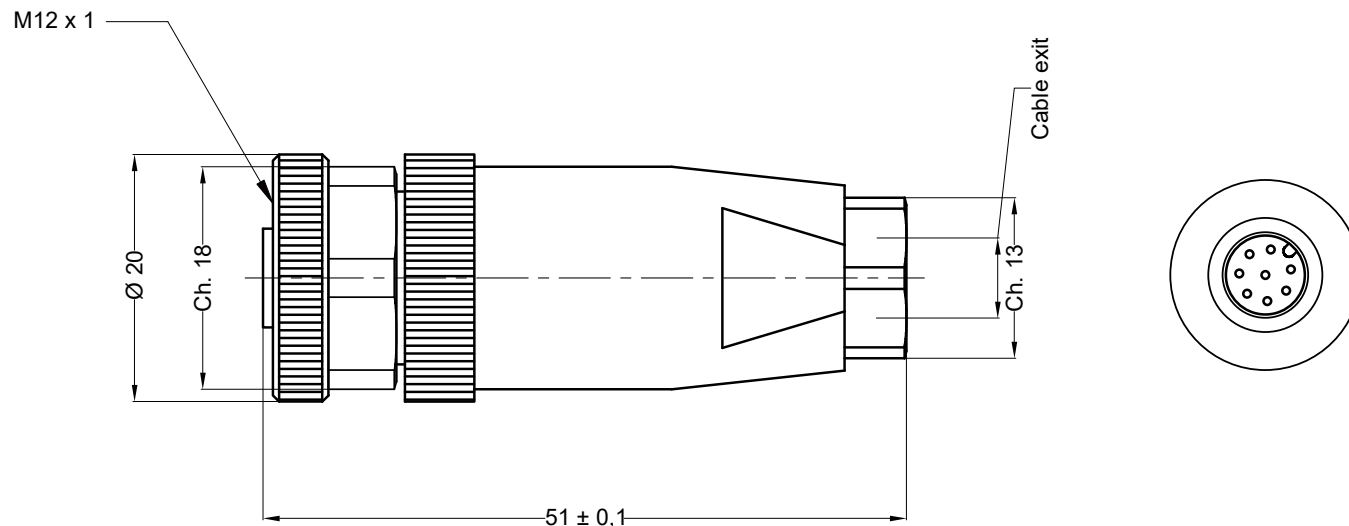





 Dim. in mm	Cable Data		Marking		Connection layout VIEW A 	Housing Data		Description:		
	Wire cross section:	AWG20/ max.0,5mmq	Text:			Standard:	IEC 61076-2-101			
 MCA CONNECTORS MCA Connectors S.r.l. Via Plebiscito, 150 73058 TUGLIE (LE) Tel.: 0833 518248 Fax.: 0833 395926 mail: info@mcaconnectors.com web: www.mcaconnectors.com	Cable Ø:	4 – 6 mm	Lot description:			Rated Voltage:	30 V	Customer:		
						Rated Current:	2 A			
			Color:			Insulation:	≥100MΩ (IEC60512)	Customer code:		
			Character height:			Contact resistance:	≤10mohm			
This drawing can not be copied or reproduced in any way and can not be passed to third parts without written authorization.			Marking position:			Fixing screw torque:	min 0,5; max 0,8 N/m	Code:		
			Marking step:			Temperature range:	-25°C...+80°C			
						Housing Color:	Black	N12FD8-CC7		
						Protection Class:	IP67			
						Contact Material:	CuZn gold plated	Drawn: <i>Giudice C.</i> Approved: <i>Giudice C.</i> Draw no.: 18078 Date: 06/08/2018 Revision date: Revision no.: 0		
						Overmoulding material:	PA6			
						Coupling nut material:	CuZn nikel plated			
						O-Ring Material:	NBR			
						Contact holder material:	PA6			