




Indicative image

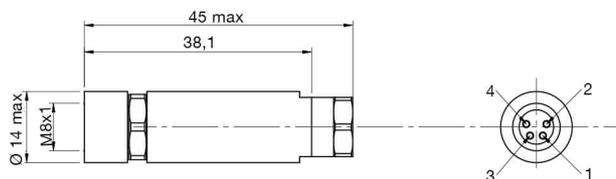

### Application

Fixing

screw terminals

### Electrical data

Rated current

a 40°C 4 A

Led

no

Wires

4

Insulation resistance

≥ 100 MΩ

Contact resistance

≤ 5 mΩ

Rated voltage

60 V (3 plugs) 30 V (4 plugs)

### Mechanical data

Connections

Field attachable

Tightening torque

0,2 Nm (M8 nut)

Operating temperature

-40 °C ... 85 °C

Head type

Axial

Plug

M8

Outer diameter

3,5 mm ... 5 mm

Stripping length of the sheath

12 mm

Wire isolation

≥ 100 MΩ

Conductors section

0,14 mm<sup>2</sup> ... 0,5 mm<sup>2</sup>

Model

Female

## Test/Approvals

Degree of protection

IP67

## Generical Data

Operating Temperature

-40 °C ... 85 °C

Mechanical Protection

IP67

---

## Datasensing S.r.l.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail [info@datasensing.com](mailto:info@datasensing.com)

## date of printing

12/05/2022 10:37:29