

Order code: **MILS13UNXXE01**


* When reordering spare transmitter/receiver, please, add the serial number of radiocontrol !



* Receiving Unit MITO MINI 8CH with internal antenna, 9-30Vac/dc power supply, not wired, cable output through M20 gland and inserted cap in PG9 gland.
MRMIVUP9RXX12



3 AA Alkaline batteries.
0101BA000039

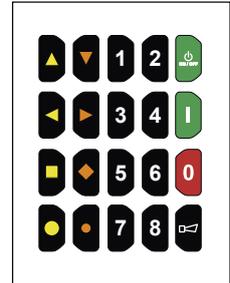

Universal label set.
0106TR004022

* Transmitting Unit MITO Mini+ with 8 push-buttons for 6 functions + START and STOP, continuous transmission with automatic switch-off after 10 minutes of inactivity, powered by 3 AA alkaline batteries.
NOTE: Optional custom labels.
MTLS13UNRXX01

TECHNICAL DATA

AT MITO MINI+

Protection degree	IP65
Dimensions	62x137x50 mm
Weight	261 g

AR MITO MINI

Protection degree	IP65
Dimensions	135x255x85 mm
Weight	1600 g


Antenna	internal
Power Supply	Alkaline batteries 3xAA 1,5V
Working temperature	-25 + +55 °C
Operating distance	150 m
ISM Working frequency	868,0125 + 870,000 MHz
Charged battery autonomy at 20 °C	~ 50 hours

Each system includes multilingual instruction manuals, CE certifications. Document subject to change, on elcaradio.biz the latest updated revisions.

Order code: MILS13UNXXE01

* When reordering spare transmitter/receiver, please, add the serial number of radiocontrol !

COMMAND LAYOUT

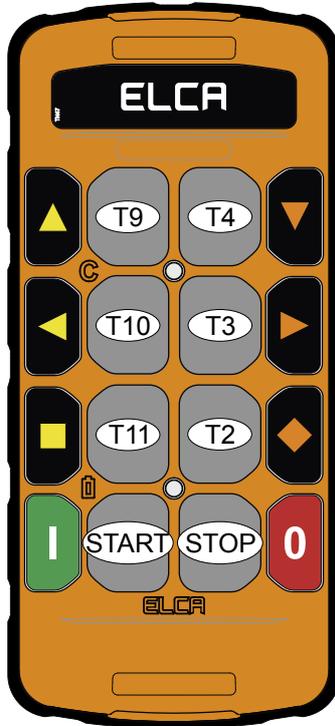

STANDARD APPLICABLE SYMBOLS

