



KEM 3160 MF11

KEM Polycarbonate 10-630A

- IP66; Enclosure types M2, M3, M4, MF11, MF01, MF02 MF03, MF04
- Self-extinguishing material
- Wide operating temperature range
- Padlockable with 3 locks
- Door interlock with defeat mechanism
- Excellent insulating properties
- Good UV resistance
- Good resistance against many chemicals
- Tested according to IEC 60947-3
- **Note!** Al-cables cannot be connected directly to switch terminals. For Al-cable connection please use a bi-metal cable connector, **available here.**

Data subject to change without notice. Always confirm the data is correct from the seller.

KEM 16-40 A Installation guide video

>>

KEM 63-80 A Installation guide video

>>

Technical datasheet >>

Accessories



We use cookies on our website to give you the most relevant experience by remembering your preferences and repeat visits. Read more about cookies from our Cookie Policy. You can consent to the use of such technologies by closing this notice, by interacting with any link or button outside of this notice or by continuing to browse otherwise..

[Cookie settings](#)


[Read More](#)

[Accept](#)

Product details

SKU	KEM 3160 MF11
AC-21 400/415 V (A)	160 A
AC-21 690 V (A)	160 A
AC-22 400/415 V (A)	160 A
AC-22 690 V (A)	160 A
AC-23 400/415 V (A/kW)	160 A / 90 kW
AC-23 690 V (A/kW)	100 A / 90 kW
Cable Area to Switch Terminal (only Cu) (mm²) / Bolt size	6-70
Color	Standard
EAN	6419410323403
Enclosure	MF11
Enclosure Type	Polycarbonate
IP Rating	65
Number of Poles	3
Operation	Front-operated
Switch type	Load Break Switch
Weight (kg)	3.3

Dimensional drawing

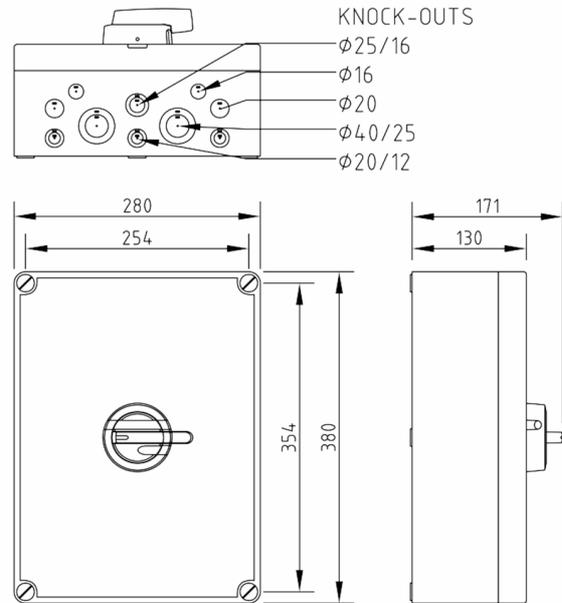

We use cookies on our website to give you the most relevant experience by remembering your preferences and repeat visits. Read more about cookies from our Cookie Policy. You can consent to the use of such technologies by closing this notice, by interacting with any link or button outside of this notice or by continuing to browse otherwise..

[Cookie settings](#)

[Read More](#)

[Accept](#)