




Indicative image

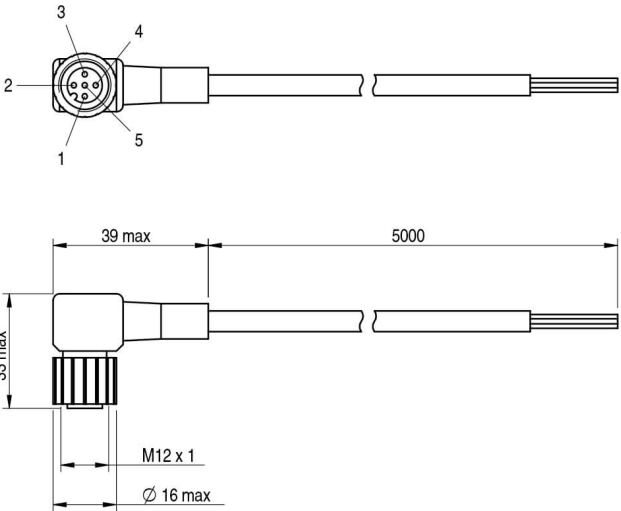

Application

Usable with

Safety light curtains: • LS2 BASE (TX and RX) • LS2 STANDARD (TX) • LS4 BASE (TX and RX) • LS4 STANDARD (TX) Safety sensors: • SH and TH • SH-IC and TH-IC

Installation

M12 5 poles axial female connector

Electrical data

Led

no

Wires

5

Mechanical data

Connections

With open ended wires

Fibre length (m)

5

Head type

90°

Plug

M12

Jacket material

PVC

Model

Female

Test/Approvals

Degree of protection

IP67

Generical Data

Mechanical Protection

IP67

) BN /1 _____

) WH /2 _____

) BU /3 _____

) BK /4 _____

) GY /5 _____

Datasensing S.r.l.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail info@datasensing.com

date of printing

02/01/2024 08:32:03