


CD

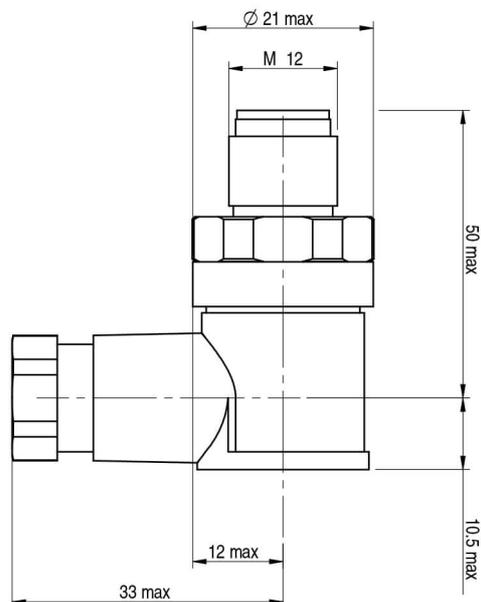

Indicative image

Application

Fixing

screw terminals

Electrical data

Rated current

4 A

Led

no

Wires

4

Insulation resistance

 $\geq 100 \text{ M}\Omega$

Contact resistance

 $\leq 5 \text{ m}\Omega$

Rated voltage

250 V

Mechanical data

Connections

Field attachable

Operating temperature

 $-25 \text{ }^\circ\text{C} \dots 90 \text{ }^\circ\text{C}$

Head type

 90°

Plug

M12

Outer diameter

3 mm ... 6,5 mm

Stripping length of the sheath

20 mm

Conductors section

Max. $0,75 \text{ mm}^2$

Model

Male

Test/Approvals

Degree of protection

IP67

Generical Data

Operating Temperature

-25 °C ... 90 °C

Mechanical Protection

IP67

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@datasensing.com

date of printing

12/05/2022 08:20:29