




Dim. in mm

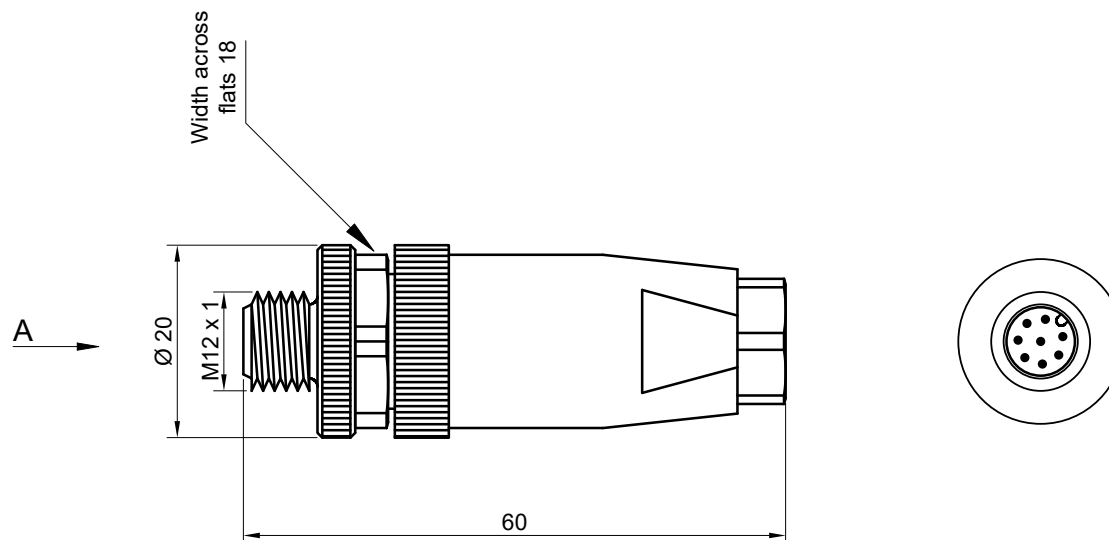

MCA Connectors S.r.l.
Via Plebiscito, 150
73058 TUGLIE (LE)
Tel.: 0833 518248
Fax.: 0833 395926
mail: info@mcaconnectors.com
web: www.mcaconnectors.com

This drawing can not be copied or reproduced in any way and can not be passed to third parts without written authorization.

Cable Data

Wire cross section: AWG20/
max.0,5mmq

Cable Ø: 4 – 6 mm

Marking

Text:

Lot
description:

Color:


Character
height:

Marking
position:

Marking
step:

Connection layout

VIEW
A



Housing Data

Standard:	IEC 61076-2-101
Rated Voltage:	30 V
Rated Current:	2 A
Insulation:	≥100MΩ (IEC60512)
Contact resistance:	≤10mohm
Fixing screw torque:	min 0,5; max 0,8 N/m
Temperature range:	-25°C...+80°C
Housing Color:	Black
Protection Class:	IP67
Contact Material:	CuZn gold plated

Overmoulding material:	PA6
Coupling nut material:	CuZn nikel plated
O-Ring Material:	NBR
Contact holder material:	PA6

Description:

Customer:

Customer code:

Code:

N12MD8-CC7

Drawn:

Giudice C.

Approved:

Giudice C.

Draw no.:

18104

Date:

19/12/2018

Revision date:

Revision no.:

0