


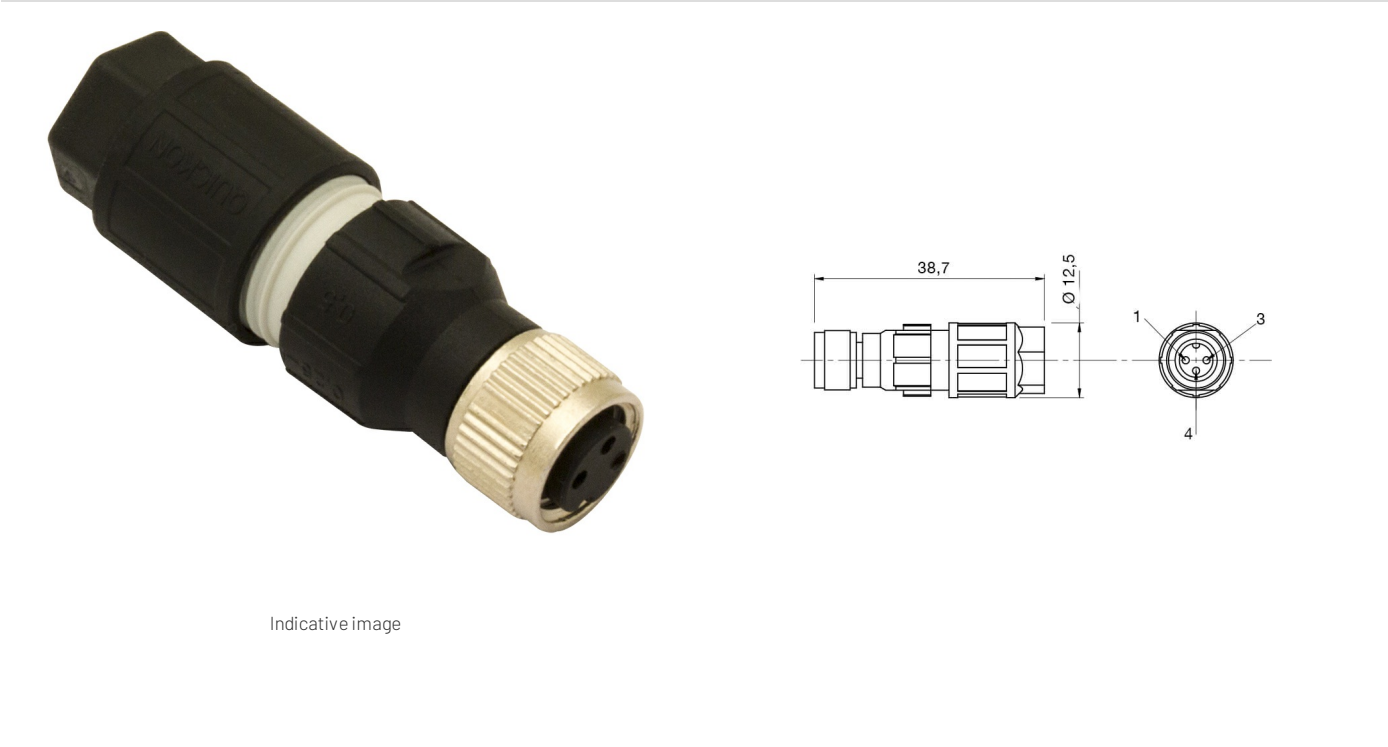

Application

Fixing	Fast connections
--------	------------------

Electrical data

Rated current	a 40°C 4 A
Led	no
Wires	3
Insulation resistance	≥ 100 MΩ
Contact resistance	≤ 5 mΩ
Rated voltage	60 V (3 plugs) 30 V (4 plugs)

Mechanical data

Connections	Field attachable
Tightening torque	0,2 Nm (M8 nut)
Operating temperature	-40 °C ... 85 °C
Head type	Axial
Plug	M8
Outer diameter	3,5 mm ... 5 mm
Stripping lenght of the sheath	12 mm
Wire isolation	≥ 100 MΩ
Conductors section	0,14 mm²...0,5 mm²
Model	Female

Test/Approvals

Degree of protection	IP67
----------------------	------

Generical Data

Operating Temperature	-40 °C ... 85 °C
-----------------------	------------------

Mechanical Protection	IP67
-----------------------	------

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@datasensing.com

date of printing

12/05/2022 09:58:42