




Indicative image

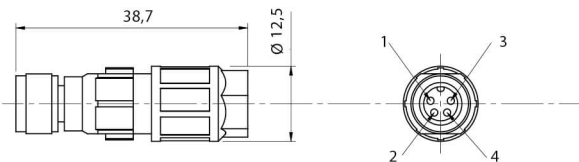

Application

Fixing	Fast connections
--------	------------------

Electrical data

Rated current	a 40°C 4 A
Led	no
Wires	4
Insulation resistance	≥ 100 MΩ
Contact resistance	≤ 5 mΩ
Rated voltage	60 V (3 plugs) 30 V (4 plugs)

Mechanical data

Connections	Field attachable
Tightening torque	0,2 Nm (M8 nut)
Operating temperature	-40 °C ... 85 °C
Head type	Axial
Plug	M8
Outer diameter	3,5 mm ... 5 mm
Stripping lenght of the sheath	12 mm
Wire isolation	≥ 100 MΩ
Conductors section	0,14 mm ² ...0,5 mm ²
Model	Female

Test/Approvals

Degree of protection

IP67

Generical Data

Operating Temperature

-40 °C ... 85 °C

Mechanical Protection

IP67

Datasensing S.r.l.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail info@datasensing.com

date of printing

12/05/2022 10:08:01