


CD

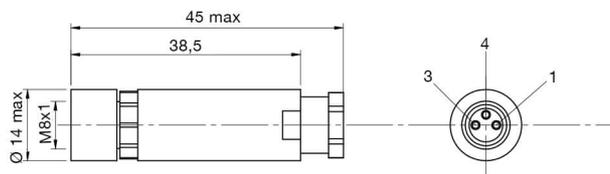

Indicative image

Application

Fixing

screw terminals

Electrical data

Rated current

a 40°C 4 A

Led

no

Wires

3

Insulation resistance

≥ 100 MΩ

Contact resistance

≤ 5 mΩ

Rated voltage

60 V (3 plugs) 30 V (4 plugs)

Mechanical data

Connections

Field attachable

Tightening torque

0,2 Nm (M8 nut)

Operating temperature

-40 °C ... 85 °C

Head type

Axial

Plug

M8

Outer diameter

3,5 mm ... 5 mm

Stripping length of the sheath

12 mm

Wire isolation

≥ 100 MΩ

Conductors section

0,14 mm²...0,5 mm²

Model

Female

Test/Approvals

Degree of protection IP67

Generical Data

Operating Temperature -40 °C ... 85 °C

Mechanical Protection IP67

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@datasensing.com

date of printing

12/05/2022 10:33:42