

HYGRASGARD® AFF/AFTF HYGRASGARD® AFF-20/AFTF-20, AFF-25/AFTF-25

On-wall humidity and temperature sensors ($\pm 1.8\%$ / $\pm 2.0\%$),
calibratable, with multi-range switching
and active/passive output



S+S REGELTECHNIK

Calibratable outdoor humidity/temperature sensor **HYGRASGARD® AFF/AFTF** ($\pm 2.0\%$) and **AFF-20/AFTF-20** ($\pm 1.8\%$) with plastic sinter filter (optional metal sinter filter) or **AFF-25/AFTF-25** ($\pm 1.8\%$) with pluggable metal sinter filter; terminal-box enclosure made of impact-resistant plastic, **with/without optional display**. It measures the relative humidity and/or temperature of the air and converts the measurand into a standard signal of 0 - 10 V or 4...20 mA. They have four switchable temperature ranges and are applied in non-aggressive, dust-free atmospheres in refrigeration, air conditioning, ventilation and clean room technology. Relative humidity (in % r.H.) is the quotient of water vapour partial pressure divided by the saturation vapour pressure at the respective gas temperature. These measuring transducers are designed for exact detection of humidity. A digital long-term stable sensor is used as measuring element for humidity measurement. Fine adjustment by the user is possible.

AFF / AFTF ($\pm 2.0\%$)
AFF-20 / AFTF-20 ($\pm 1.8\%$)
with plastic sinter filter
(standard)

TECHNICAL DATA

Power supply:	24 V AC ($\pm 20\%$); 15...36 V DC for U variant 15...36 V DC for I variant, depending on working resistance, residual ripple stabilised ± 0.3 V
Working resistance:	$R_a(\text{ohm}) = (U_b - 14 \text{ V}) / 0.02 \text{ A}$ for I variant
Load resistance:	$R_L > 5 \text{ kOhm}$ for U variant
Power consumption:	$< 1.1 \text{ VA} / 24 \text{ V DC}$; $< 2.2 \text{ VA} / 24 \text{ V AC}$
Sensors:	digital humidity sensor with integrated temperature sensor , low hysteresis, high long-term stability
Sensor protection:	AFF / AFTF, AFF-20 / AFTF-20: plastic sinter filter, $\varnothing 16 \text{ mm}$, $L = 35 \text{ mm}$, exchangeable (optional metal sinter filter, $\varnothing 16 \text{ mm}$, $L = 32 \text{ mm}$) AFF-25 / AFTF-25: pluggable measuring head (probe), stainless steel V2A (1.4301), with metal sinter filter, $\varnothing 16 \text{ mm}$, $L = 88.5 \text{ mm}$, exchangeable



AFF-25 / AFTF-25 ($\pm 1.8\%$)
pluggable measuring head
with metal sinter filter



HUMIDITY	
Measuring range, humidity:	0...100 % r.H. (output corresponding to 0 - 10 V or 4...20 mA)
Permissible air humidity:	$< 95\%$ r.H., non-precipitating air
Deviation, humidity:	AFF / AFTF: typically $\pm 2.0\%$ (20...80 % r.H.) at $+25^\circ\text{C}$, otherwise $\pm 3.0\%$ AFF-20 / AFTF-20, AFF-25 / AFTF-25: typically $\pm 1.8\%$ (10...90 % r.H.) at $+25^\circ\text{C}$, otherwise $\pm 2.0\%$
Output, humidity:	0 - 10 V for U variant 4...20 mA for I variant, see load resistance diagram
TEMPERATURE	
Measuring range, temperature:	multi-range switching (see table) $-35...+35^\circ\text{C}$; $-35...+75^\circ\text{C}$; $0...+50^\circ\text{C}$; $0...+80^\circ\text{C}$ (output corresponding to 0 - 10 V or 4...20 mA)
Ambient temperature:	storage $-35...+85^\circ\text{C}$; operation $-30...+80^\circ\text{C}$, non-precipitating
Deviation, temperature:	AFF / AFTF: typically $\pm 0.4 \text{ K}$ at $+25^\circ\text{C}$ AFF-20 / AFTF-20, AFF-25 / AFTF-25: typically $\pm 0.2 \text{ K}$ at $+25^\circ\text{C}$
Output, temperature:	0 - 10 V or 4...20 mA or Ohm value
Electrical connection:	2-, 3-, or 4-wire connection (see connecting diagram), 0.14 - 1.5 mm ² , via terminal screws
Enclosure:	plastic, UV-stabilised, material polyamide, 30 % glass-globe reinforced, with quick-locking screws (slotted / Phillips head combination), colour traffic white (similar to RAL 9016), enclosure cover for display is transparent!
Enclosure dimensions:	126 x 90 x 50 mm (Tyr 2)
Cable gland:	M 16 x 1.5, including strain relief, exchangeable, max. inner diameter 10.4 mm
Protective tube:	stainless steel V2A (1.4301), $\varnothing 16 \text{ mm}$ AFF / AFTF: NL = 55 mm AFF-20 / AFTF-20: NL = 137 mm AFF-25 / AFTF-25: NL = 88.5 mm
Process connection:	by screws
Long-term stability:	$\pm 1\%$ per year
Protection class:	III (according to EN 60 730)
Protection type:	IP 65 (according to EN 60 529) enclosure only!
Standards:	CE conformity, according to EMC directive 2014 / 30 / EU, according to EN 61326-1, according to EN 61326-2-3
Optional:	three-line display with illumination , cutout 70 x 40 mm (W x H), for displaying ACTUAL temperature and / or ACTUAL humidity
ACCESSORIES	see last chapter



S+S REGELTECHNIK


HYGRASGARD® AFF/AFTF AFF-20/AFTF-20, AFF-25/AFTF-25

On-wall humidity and temperature sensors ($\pm 1.8\%$ / $\pm 2.0\%$),
calibratable, with multi-range switching
and active/passive output



Dimensional drawing

AFF / AFTF
AFF-20 / AFTF-20

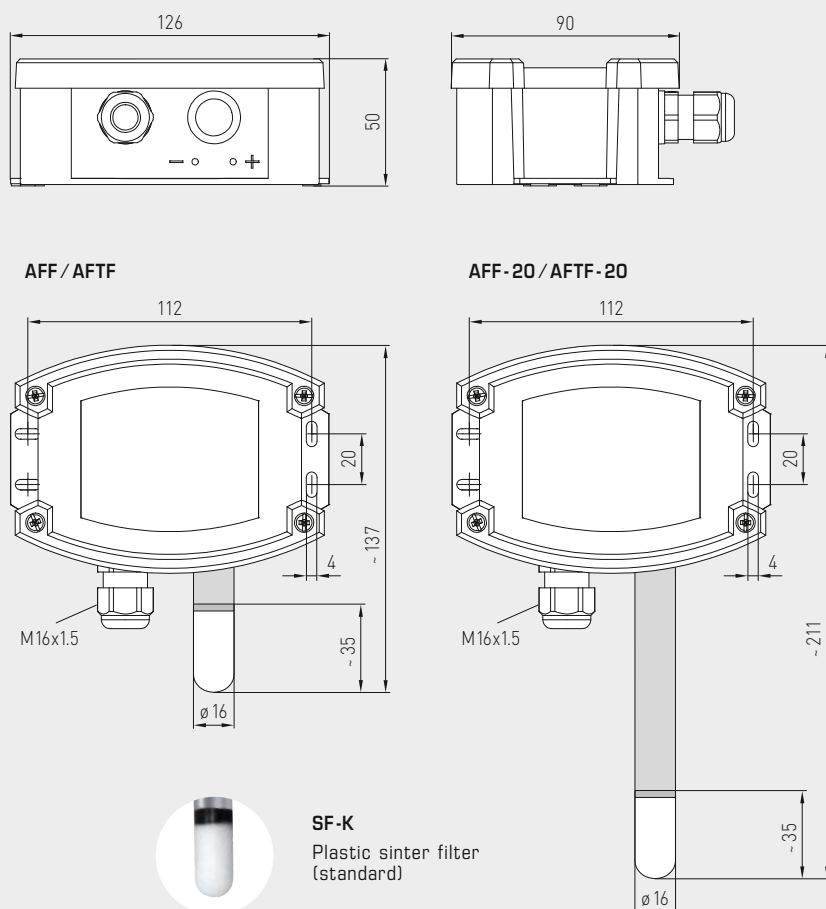


AFF / AFTF ($\pm 2.0\%$)
AFF-20 / AFTF-20 ($\pm 1.8\%$)
with display and
plastic sinter filter
(standard)



Dimensional drawing

AFF-25 / AFTF-25

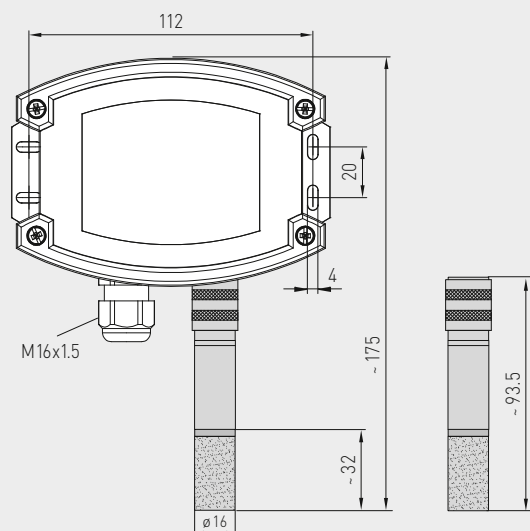

AFF-25 / AFTF-25 ($\pm 1.8\%$)
pluggable measuring head
with metal sinter filter
and display



HYGRASGARD® AFF/AFTF

HYGRASGARD® AFF-20/AFTF-20, AFF-25/AFTF-25


On-wall humidity and temperature sensors ($\pm 1.8\%$ / $\pm 2.0\%$),
calibratable, with multi-range switching
and active/passive output



S+S REGELTECHNIK

Schematic diagram


AFTF-xx-U
with display

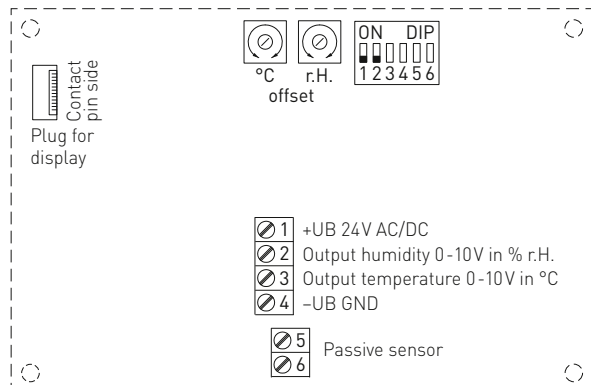

DIP 3, 4, 5, 6 are not assigned!

Schematic diagram**

AFTF-xx-I
with display

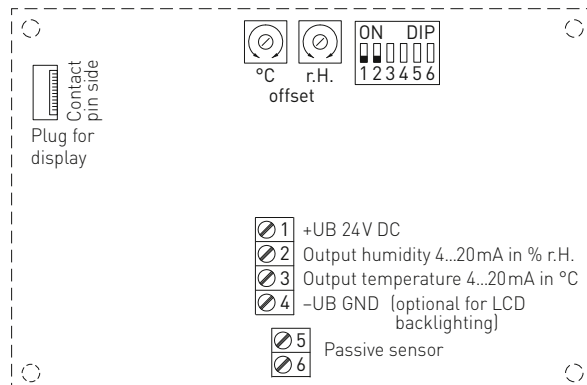

DIP 3, 4, 5, 6 are not assigned!

3-wire
connection

AFF-xx-U

- 1 +UB 24V AC/DC
- 2 Output humidity in % r.H. 0-10V
- 3 Free
- 4 -UB-GND

2- or 3-wire
connection*

AFF-xx-I
(Transmitter)

- 1 +UB 24V DC
- 2 Output humidity in % r.H. 4...20mA
- 3 Free
- 4 -UB-GND (optional for backlighting)

4- or 6-wire
connection*

AFTF-U
(passive
temperature sensor)

- 1 +UB 24V AC/DC
- 2 Output humidity in % r.H. 0-10V
- 3 Output temperature in °C 0-10V
- 4 -UB-GND
- 5 Passive element
- 6 e.g. Pt1000, Ni1000, LMZ235Z

4-wire
connection

AFTF-xx-U

- 1 +UB 24V AC/DC
- 2 Output humidity in % r.H. 0-10V
- 3 Output temperature in °C 0-10V
- 4 -UB-GND

3- or 4-wire
connection**

AFTF-xx-I
(Transmitter)

- 1 +UB 24V DC
- 2 Output humidity in % r.H. 4...20mA
- 3 Output temperature in °C 4...20mA
- 4 -UB-GND (optional for backlighting)

4- or 6-wire
connection


AFTF-I
(passive
temperature sensor)

- 1 +UB 24V DC
- 2 Output humidity in % r.H. 4...20mA
- 3 Output temperature in °C 4...20mA
- 4 -UB-GND (optional for backlighting)
- 5 Passive element
- 6 e.g. Pt1000, Ni1000, LMZ235Z

Temperature measuring ranges (adjustable)	DIP 1	DIP 2
-35...+75 °C	ON	ON
-35...+35 °C	OFF	OFF
0...+50 °C (default)	OFF	ON
0...+80 °C	ON	OFF

Load resistance diagram
4...20 mA

AFF-xx
AFTF-xx

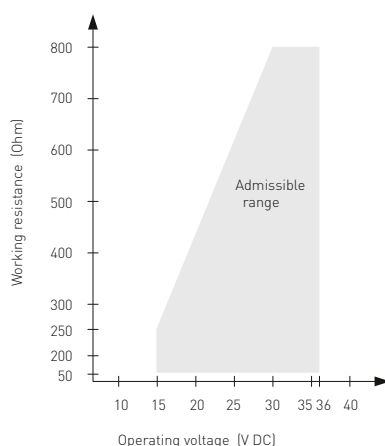

Connection*:

2-wire connection for devices with / without display (not illuminated)
3-wire connection for devices with illuminated display

Connection**:

3-wire connection for devices with / without display (not illuminated)
4-wire connection for devices with illuminated display

For the **I** variant the humidity path must be connected!



S+S REGELTECHNIK

HYGRASGARD® AFF/AFTF

HYGRASGARD® AFF-20/AFTF-20, AFF-25/AFTF-25

On-wall humidity and temperature sensors ($\pm 1.8\%$ / $\pm 2.0\%$),
calibratable, with multi-range switching
and active/passive output

AFF/AFTF ($\pm 2.0\%$)
AFF-20/AFTF-20 ($\pm 1.8\%$)
with display



AFF-25/AFTF-25 ($\pm 1.8\%$)
with display



Temperature table
MR: $-35...+75\text{ }^{\circ}\text{C}$

$^{\circ}\text{C}$	U_A in V	I_A in mA
-35	0.0	4.0
-30	0.5	4.7
-25	0.9	5.5
-20	1.4	6.2
-15	1.8	6.9
-10	2.3	7.6
-5	2.7	8.4
0	3.2	9.1
5	3.6	9.8
10	4.1	10.5
15	4.5	11.3
20	5.0	12.0
25	5.5	12.7
30	5.9	13.5
35	6.4	14.2
40	6.8	14.9
45	7.3	15.6
50	7.7	16.4
55	8.2	17.1
60	8.6	17.8
65	9.1	18.5
70	9.5	19.2
75	10.0	20.0

Temperature table
MR: $-35...+35\text{ }^{\circ}\text{C}$

$^{\circ}\text{C}$	U_A in V	I_A in mA
-35	0.0	4.0
-30	0.7	5.1
-25	1.4	6.3
-20	2.1	7.4
-15	2.9	8.6
-10	3.6	9.7
-5	4.3	10.9
0	5.0	12.0
5	5.7	13.1
10	6.4	14.3
15	7.1	15.4
20	7.9	16.6
25	8.6	17.7
30	9.3	18.9
35	10.0	20.0

Temperature table
MR: $0...+50\text{ }^{\circ}\text{C}$

$^{\circ}\text{C}$	U_A in V	I_A in mA
0	0.0	4.0
5	1.0	5.6
10	2.0	7.2
15	3.0	8.8
20	4.0	10.4
25	5.0	12.0
30	6.0	13.6
35	7.0	15.2
40	8.0	16.8
45	9.0	18.4
50	10.0	20.0

Temperature table
MR: $0...+80\text{ }^{\circ}\text{C}$

$^{\circ}\text{C}$	U_A in V	I_A in mA
0	0.0	4.0
5	0.6	5.0
10	1.3	6.0
15	1.9	7.0
20	2.5	8.0
25	3.1	9.0
30	3.8	10.0
35	4.4	11.0
40	5.0	12.0
45	5.6	13.0
50	6.3	14.0
55	6.9	15.0
60	7.5	16.0
65	8.1	17.0
70	8.8	18.0
75	9.4	19.0
80	10.0	20.0

Humidity table
MR: $0...100\%$ r. H.

% r.H.	U_A in V	I_A in mA
0	0.0	4.0
5	0.5	4.8
10	1.0	5.6
15	1.5	6.4
20	2.0	7.2
25	2.5	8.0
30	3.0	8.8
35	3.5	9.6
40	4.0	10.4
45	4.5	11.2
50	5.0	12.0
55	5.5	12.8
60	6.0	13.6
65	6.5	14.4
70	7.0	15.2
75	7.5	16.0
80	8.0	16.8
85	8.5	17.6
90	9.0	18.4
95	9.5	19.2
100	10.0	20.0

On-wall humidity and temperature sensors ($\pm 2.0\%$),
calibratable, with multi-range switching
and active/passive output

S+S REGELTECHNIK

HYGRASGARD® AFF HYGRASGARD® AFTF

On-wall humidity sensors ($\pm 2.0\%$), *Standard*On-wall humidity and temperature sensors ($\pm 2.0\%$), *Standard*

Type / WG02	Measuring Range / Readout		Output		Display	Item No.	Price
	Humidity	Temperature	Humidity	Temperature			
AFF-I	[active]						
AFF-I TYR-2	0...100% r. H.	–	4...20 mA	–		1201-7112-0000-000	160,53 €
AFF-I TYR-2 DISPLAY	0...100% r. H.	–	4...20 mA	–	■	1201-7112-0400-000	203,47 €
AFF-U	[active]						
AFF-U TYR-2	0...100% r. H.	–	0-10 V	–		1201-7111-0000-000	160,53 €
AFF-U TYR-2 DISPLAY	0...100% r. H.	–	0-10 V	–	■	1201-7111-0400-000	203,47 €
AFTF-I	[active]						
AFTF-I TYR 2	0...100% r. H.	–35...+75 °C –35...+35 °C 0...+50 °C 0...+80 °C	4...20 mA	4...20 mA		1201-7112-1000-000	176,10 €
AFTF-I TYR 2 DISPLAY	0...100% r. H.	(4x as above)	4...20 mA	4...20 mA	■	1201-7112-1400-000	219,04 €
AFTF-U	[active]						
AFTF-U TYR-2	0...100% r. H.	–35...+75 °C –35...+35 °C 0...+50 °C 0...+80 °C	0-10 V	0-10 V		1201-7111-1000-000	176,10 €
AFTF-U TYR-2 DISPLAY	0...100% r. H.	(4x as above)	0-10 V	0-10 V	■	1201-7111-1400-000	219,04 €

HYGRASGARD® AFTF-U xx

On-wall humidity and temperature sensors ($\pm 2.0\%$), *Standard*

Type / WG02	Measuring Range / Readout		Output			Item No.	Price
	Humidity	Temperature	Humidity	Temperature			
AFTF-U xx	Pt, Ni, LM235Z					[active / passive]	
AFTF-U PT100	0...100% r. H.	–35...+75 °C –35...+35 °C 0...+50 °C 0...+80 °C	0-10 V	0-10 V + Pt100		1201-7111-2001-000	177,17 €
AFTF-U PT1000	0...100% r. H.	(4x as above)	0-10 V	0-10 V + Pt1000		1201-7111-2005-000	178,24 €
AFTF-U NI1000	0...100% r. H.	(4x as above)	0-10 V	0-10 V + Ni1000		1201-7111-2009-000	178,78 €
AFTF-U NITK	0...100% r. H.	(4x as above)	0-10 V	0-10 V + Ni1000TK5000		1201-7111-2010-000	179,31 €
AFTF-U LM235Z	0...100% r. H.	(4x as above)	0-10 V	0-10 V + LM235Z, 10mV/K		1201-7111-2021-000	178,34 €
AFTF-U xx	NTC					[active / passive]	
AFTF-U NTC1,8K	0...100% r. H.	–35...+75 °C –35...+35 °C 0...+50 °C 0...+80 °C	0-10 V	0-10 V + NTC 1.8 kOhm		1201-7111-2012-000	179,10 €
AFTF-U NTC10K	0...100% r. H.	(4x as above)	0-10 V	0-10 V + NTC 10 kOhm		1201-7111-2015-000	176,64 €
AFTF-U NTC20K	0...100% r. H.	(4x as above)	0-10 V	0-10 V + NTC 20 kOhm		1201-7111-2016-000	176,64 €

Accessories

SF-M	Metal sinter filter, Ø 16 mm, L = 32 mm, exchangeable stainless steel V4A (1.4404)	7000-0050-2200-100	35,70 €
WS-01	Sun and ball-impact protection hood, 184 x 180 x 80 mm, stainless steel V2A (1.4301)	7100-0040-2000-000	26,80 €
WS-03	Weather and sun protection hood, 200 x 180 x 150 mm, stainless steel V2A (1.4301)	7100-0040-6000-000	37,74 €

For further information see last chapter!



S+S REGELTECHNIK

HYGRASGARD® AFF-20/AFTF-20
HYGRASGARD® AFF-25/AFTF-25

On-wall humidity and temperature sensors ($\pm 1.8\%$),
calibratable, with multi-range switching
and active/passive output



HYGRASGARD® AFF-20		On-wall humidity sensors (± 1.8 %), <i>Premium</i>					
HYGRASGARD® AFTF-20		On-wall humidity and temperature sensors (± 1.8 %), <i>Premium</i>					
Type / WG02	Measuring Range / Readout		Output		Display	Item No.	Price
	Humidity	Temperature	Humidity	Temperature			
AFF-20-I						(active)	
AFF-20-I TYR-2	0...100 % r. H.	–	4...20 mA	–		1201-7112-0000-201	203,47 €
AFF-20-I TYR-2 DISPLAY	0...100 % r. H.	–	4...20 mA	–	■	1201-7112-0400-201	246,43 €
AFF-20-U						(active)	
AFF-20-U TYR-2	0...100 % r. H.	–	0-10 V	–		1201-7111-0000-201	203,47 €
AFF-20-U TYR-2 DISPLAY	0...100 % r. H.	–	0-10 V	–	■	1201-7111-0400-201	246,43 €
AFTF-20-I						(active)	
AFTF-20-I TYR-2	0...100 % r. H.	–35...+75 °C –35...+35 °C 0...+50 °C 0...+80 °C	4...20 mA	4...20 mA		1201-7112-1000-201	223,38 €
AFTF-20-I TYR-2 DISPLAY	0...100 % r. H.	(4x as above)	4...20 mA	4...20 mA	■	1201-7112-1400-201	264,18 €
AFTF-20-U						(active)	
AFTF-20-U TYR-2	0...100 % r. H.	–35...+75 °C –35...+35 °C 0...+50 °C 0...+80 °C	0-10 V	0-10 V		1201-7111-1000-201	223,38 €
AFTF-20-U TYR-2 DISPLAY	0...100 % r. H.	(4x as above)	0-10 V	0-10 V	■	1201-7111-1400-201	264,18 €
HYGRASGARD® AFF-25		On-wall humidity sensors, pluggable (± 1.8 %), <i>Deluxe</i>					
HYGRASGARD® AFTF-25		On-wall humidity and temperature sensors, pluggable (± 1.8 %), <i>Deluxe</i>					
Type / WG02	Measuring Range / Readout		Output		Display	Item No.	Price
	Humidity	Temperature	Humidity	Temperature			
AFF-25-I						(active)	
AFF-25-I TYR-2	0...100 % r. H.	–	4...20 mA	–		1201-7132-0000-101	300,64 €
AFF-25-I TYR-2 DISPLAY	0...100 % r. H.	–	4...20 mA	–	■	1201-7132-0400-101	342,66 €
AFF-25-U						(active)	
AFF-25-U TYR-2	0...100 % r. H.	–	0-10 V	–		1201-7131-0000-101	300,64 €
AFF-25-U TYR-2 DISPLAY	0...100 % r. H.	–	0-10 V	–	■	1201-7131-0400-101	342,66 €
AFTF-25-I						(active)	
AFTF-25-I TYR-2	0...100 % r. H.	–35...+75 °C –35...+35 °C 0...+50 °C 0...+80 °C	4...20 mA	4...20 mA		1201-7132-1000-101	318,90 €
AFTF-25-I TYR-2 DISPLAY	0...100 % r. H.	(4x as above)	4...20 mA	4...20 mA	■	1201-7132-1400-101	360,92 €
AFTF-25-U						(active)	
AFTF-25-U TYR-2	0...100 % r. H.	–35...+75 °C –35...+35 °C 0...+50 °C 0...+80 °C	0-10 V	0-10 V		1201-7131-1000-101	318,90 €
AFTF-25-U TYR-2 DISPLAY	0...100 % r. H.	(4x as above)	0-10 V	0-10 V	■	1201-7131-1400-101	360,92 €
Accessories							
SF-M	Metal sinter filter, Ø 16 mm, L = 32 mm, exchangeable stainless steel V4A (1.4404)					7000-0050-2200-100	35,70 €
MSK-25	Pluggable measuring head (probe) stainless steel V2A (1.4301), Metal sinter filter, Ø 16 mm, L = 88.5 mm, exchangeable replacement element for AFF-25 / AFTF-25					7201-1131-0000-000	181,46 €
WS-01	Sun and ball-impact protection hood, 184 x 180 x 80 mm, stainless steel V2A (1.4301)					7100-0040-2000-000	26,80 €
WS-03	Weather and sun protection hood, 200 x 180 x 150 mm, stainless steel V2A (1.4301)					7100-0040-6000-000	37,74 €
For further information see last chapter!							