


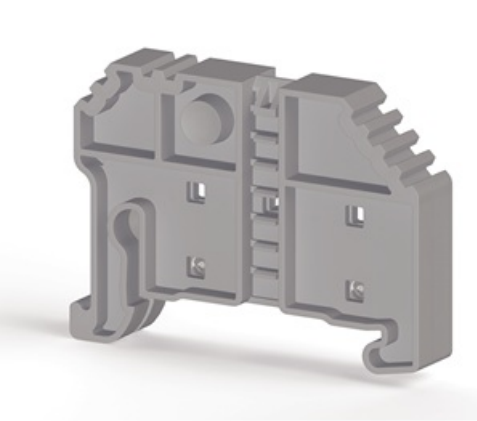

Klemsan®

495059 KD 4

KD 4

General Product Information	Insulating material	PA
	Inflammability class acc. to UL 94	V2
	Quantity	100
	Operation Temperature Min.-Max.	-55 / 120 °C
Dimensions	Width	8 mm
	Length	46,8
	Height	35,4 / 42,9 mm

Mounting Rails



●
35x15, Slotted

MR 35x15-MR



●
MR 35x15 (1 m.)-MR 35x15 (1 m.) Non-Slotted



●
35x7,5 - Slotted

MR 35x7,5-MR



●
MR 35x7,5 (1 m.)-MR 35x7,5 (1 m.) Non-Slotted

Group Markings



● ME 1-1-KD 4 can be used with stopper , transparent group label.



● ME 1-2-KD 4 can be used with stopper , transparent group label.



● ME 2-2-KD 4 can be used with stopper , transparent group label.



● ME3-KD 7 can be used with stopper , transparent group label.

LATAM - RETIE Sertifikası - LATAM - Retie Certificate

AutoCat File

Order Info		
	495050	KD 4
	495059	KD 4