



**Auxiliary contact module, raised, 2N/O+2N/C, surface mounting, screw connection**

**EATON**  
Powering Business Worldwide™

**Part no.** DILA-XHIT22  
**Catalog No.** 101044  
**Eaton Catalog No.** XTCEXFATC22

## Delivery program

|   |          |  |    |  |
|---|----------|--|----|--|
| Accessories                                   |          | Auxiliary contact modules  |    |  |
| Description                                   |          | with interlocked opposing contacts<br>Switching elements according to EN 50005<br>Version E combinations correspond to EN 50011 and are to be preferred.<br>The DC operated contactor DILA(C)-22 must only be combined with 2-pole auxiliary contacts.                                     |    |  |
| Function                                      |          | for combination with electrical wiringlinks  |    |  |
| Number of poles                               |          | 4 pole   |    |  |
| Connection technique                          |          | Screw terminals  |    |  |
| <b>Rated operational current</b>              |          |  |    |  |
| Conventional free air thermal current, 1 pole |          |  |    |  |
| Open  |          |  |    |  |
| at 60 °C                                      | $I_{th}$ | A  | 16 |  |
| AC-15   |          |  |    |  |
| 220 V 230 V 240 V                             | $I_e$    | A  | 4  |  |
| 380 V 400 V 415 V                             | $I_e$    | A  | 4  |  |
| <b>Contacts</b>                               |          |  |    |  |
| N/O = Normally open                           |          | 2 N/O  |    |  |
| N/C = Normally closed                         |          | 2 NC   |    |  |
| Mounting type                                 |          | Front fixing   |    |  |
| Contact sequence                              |          |  |    |  |
| For use with                                  |          | DILM7...<br>DILM9...<br>DILM12...<br>DILM15...<br>DILL...<br>MSC-D...M7(9, 12, 15)...<br>MSC-R...M7(9, 12)   |    |  |
| Type  |          | high version   |    |  |
| <b>Instructions</b>                           |          | Interlocked opposing contacts according to IEC/EN 60947-5-1 appendix L, inside the auxiliary contact modules, also for the integrated auxiliary contacts of the DILM 7 - DILM32<br>Auxiliary contacts used as mirror contacts according to IEC/EN 60947-4-1 Appendix F (not N/C late open) |    |  |

## Technical data

### Electrical specifications for standard auxiliary contacts

|   |           |      |       |                |
|---|-----------|------|-------|----------------|
| Interlocked opposing contacts within an auxiliary contact module (to IEC 60947-5-1 Annex L)     |           |      |       | Yes            |
| N/C contact (not late-break contact) suitable as a mirror contact (to IEC/EN 60947-4-1 Annex F) |           |      |       | DILM7 - DILM15 |
| Rated impulse withstand voltage   | $U_{imp}$ | kV   | 6     |                |
| Oversvoltage category/pollution degree  |           |      | III/3 |                |
| Rated insulation voltage  | $U_i$     | V AC | 690   |                |
| Rated operational voltage   | $U_e$     | V AC | 500   |                |
| Safe isolation to EN 61140  |           |      |       |                |
| between coil and auxiliary contacts   |           | V AC | 400   |                |
| between the auxiliary contacts  |           | V AC | 400   |                |
| Rated operational current   |           | A    |       |                |
| Conventional free air thermal current, 1 pole   |           |      |       |                |

|                                      |            |               |           |  |
|--------------------------------------|------------|---------------|-----------|--|
| Open                                 |            |               |           |  |
| at 60 °C                             | $I_{th}$   | A             | 16        |  |
| AC-15                                |            |               |           |  |
| 220 V 230 V 240 V                    | $I_e$      | A             | 4         |  |
| 380 V 400 V 415 V                    | $I_e$      | A             | 4         |  |
| 500 V                                | $I_e$      | A             | 1.5       |  |
| DC current                           |            |               |           |  |
| DC L/R ≤ 15 ms                       |            |               |           |  |
| Contacts in series:                  |            | A             |           |  |
| 1                                    | 24 V       | A             | 10        |  |
| 1                                    | 60 V       | A             | 6         |  |
| 1                                    | 110 V      | A             | 3         |  |
| 1                                    | 220 V      | A             | 1         |  |
| DC L/R ≤ 50 ms                       |            |               |           |  |
| 3                                    | 24 V       | A             | 2.5       |  |
| 3                                    | 60 V       | A             | 1         |  |
| 3                                    | 110 V      | A             | 0.5       |  |
| 3                                    | 220 V      | A             | 0.25      |  |
| DC-13 (6xP)                          |            |               |           |  |
| 24 V                                 | $I_e$      | A             | 2.5       |  |
| 60 V                                 | $I_e$      | A             | 1         |  |
| 110 V                                | $I_e$      | A             | 0.5       |  |
| 220 V                                | $I_e$      | A             | 0.25      |  |
| Control circuit reliability          |            | Failure rate  | $\lambda$ | <10 <sup>-8</sup> , < one failure at 100 million operations (at $U_e = 24$ V DC, $U_{min} = 17$ V, $I_{min} = 5.4$ mA)<br><5.3 x 10 <sup>-8</sup> , < one failure in 19 millions operations (at $U_e = 24$ V DC, $U_{min} = 17$ V, $I_{min} = 1$ mA) |
| Component lifespan                   |            |               |           |  |
| at $U_e = 230$ V, AC-15, 3 A         | Operations | $\times 10^6$ | 1.3       |  |
| Short-circuit rating without welding |            |               |           |  |
| max. fuse                            |            | A gG/gL       | 10        |  |

### Rating data for approved types

|                    |  |   |      |  |
|--------------------|--|---|------|--|
| Auxiliary contacts |  |   |      |  |
| Pilot Duty         |  |   |      |  |
| AC operated        |  |   | A600 |  |
| DC operated        |  |   | P300 |  |
| General Use        |  |   |      |  |
| AC                 |  | V | 600  |  |
| AC                 |  | A | 10   |  |
| DC                 |  | V | 250  |  |
| DC                 |  | A | 1    |  |

### Design verification as per IEC/EN 61439

|  |            |    |      |  |
|--|------------|----|------|--|
| Technical data for design verification                   |            |    |      |  |
| Rated operational current for specified heat dissipation | $I_n$      | A  | 4    |  |
| Heat dissipation per pole, current-dependent             | $P_{vid}$  | W  | 0.16 |  |
| Equipment heat dissipation, current-dependent            | $P_{vid}$  | W  | 0    |  |
| Static heat dissipation, non-current-dependent           | $P_{vs}$   | W  | 0    |  |
| Heat dissipation capacity                                | $P_{diss}$ | W  | 0    |  |
| Operating ambient temperature min.                       |            | °C | -25  |  |
| Operating ambient temperature max.                       |            | °C | 60   |  |
| IEC/EN 61439 design verification                         |            |    |      |  |
| 10.2 Strength of materials and parts                     |            |    |      | Meets the product standard's requirements. |
| 10.2.2 Corrosion resistance                              |            |    |      | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures |            |    |      | Meets the product standard's requirements. |

|  |  |
|--|--|
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   | Meets the product standard's requirements.   |
| 10.2.5 Lifting   | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |  |
| 10.9.2 Power-frequency electric strength   | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Auxiliary contact block (EC000041)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Auxiliary switch block (ecl@ss10.0.1-27-37-13-02 [AKN342013])

|   |                  |
|---|------------------|
| Number of contacts as change-over contact     | 0                |
| Number of contacts as normally open contact   | 2                |
| Number of contacts as normally closed contact | 2                |
| Number of fault-signal switches               | 0                |
| Rated operation current Ie at AC-15, 230 V    | A 4              |
| Type of electric connection                   | Screw connection |
| Model   | Top mounting     |
| Mounting method                               | Front fastening  |
| Lamp holder                                   | None             |

## Approvals

|                                      |   |
|--------------------------------------|---|
| Product Standards                    | IEC/EN 60947-4-1; UL 508; CSA-C22.2 No. 14-05; CE marking |
| UL File No.                          | E29184  |
| UL Category Control No.              | NKCR  |
| CSA File No.                         | 012528  |
| CSA Class No.                        | 3211-03   |
| North America Certification          | UL listed, CSA certified                                  |
| Specially designed for North America | No  |


## Characteristics

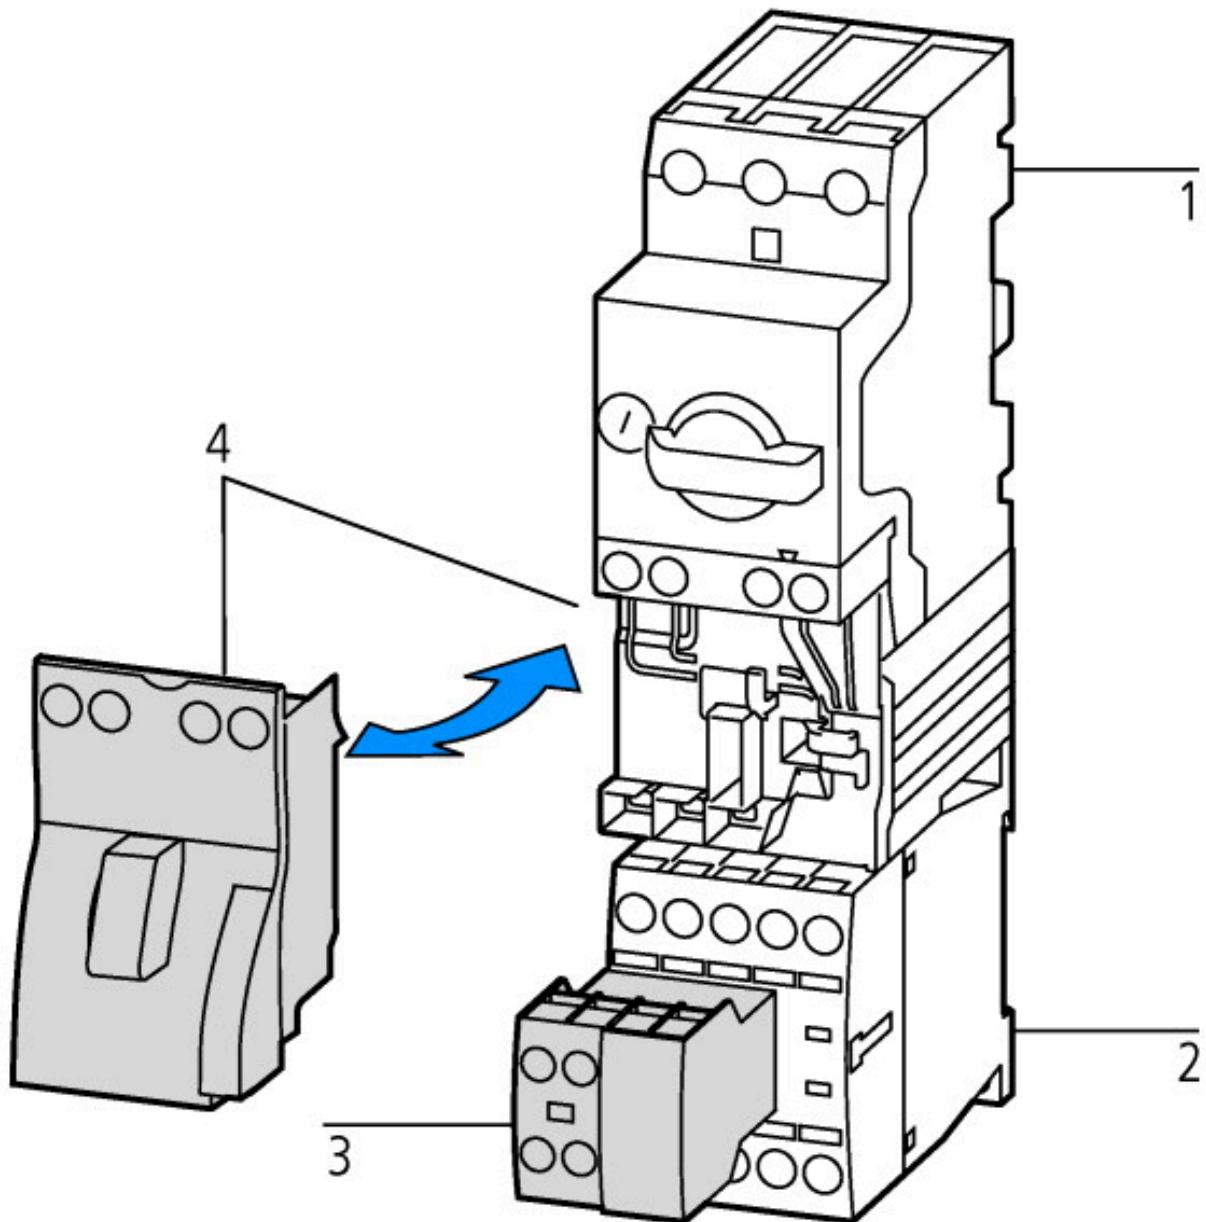

suitable for assemblies with electrical wiring bridges

- 1: Motor-protective circuit-breakers
- 2: Contactor
- 3: Auxiliary contact modules
- 4: Wiring set

## Dimensions

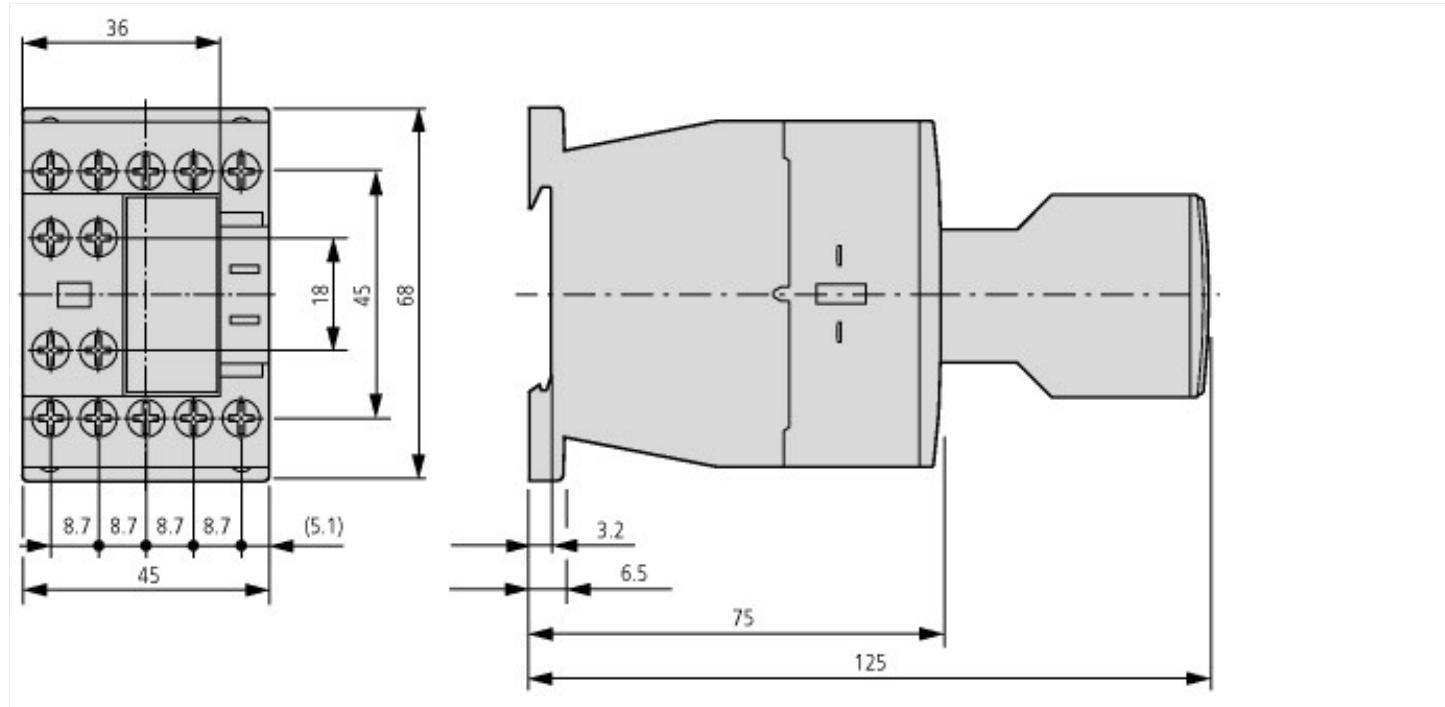

## Additional product information (links)

### IL03407013Z (AWA2100-2126) Contactors

IL03407013Z (AWA2100-2126) Contactors [ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL03407013Z2018\\_07.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407013Z2018_07.pdf)

Motor starters and "Special Purpose Ratings" for the North American market [http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct\\_3258146.pdf](http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf)

Switchgear of Power Factor Correction Systems [http://www.moeller.net/binary/ver\\_techpapers/ver934en.pdf](http://www.moeller.net/binary/ver_techpapers/ver934en.pdf)

X-Start - Modern Switching Installations Efficiently Fitted and Wired Securely [http://www.moeller.net/binary/ver\\_techpapers/ver938en.pdf](http://www.moeller.net/binary/ver_techpapers/ver938en.pdf)

Mirror Contacts for Highly-Reliable Information Relating to Safety-Related Control Functions [http://www.moeller.net/binary/ver\\_techpapers/ver944en.pdf](http://www.moeller.net/binary/ver_techpapers/ver944en.pdf)

Effect of the Cable Capacitance of Long Control Cables on the Actuation of Contactors [http://www.moeller.net/binary/ver\\_techpapers/ver949en.pdf](http://www.moeller.net/binary/ver_techpapers/ver949en.pdf)

Switchgear for Luminaires [http://www.moeller.net/binary/ver\\_techpapers/ver955en.pdf](http://www.moeller.net/binary/ver_techpapers/ver955en.pdf)

Standard Compliant and Functionally Safe Engineering Design with Mechanical Auxiliary Contacts [http://www.moeller.net/binary/ver\\_techpapers/ver956en.pdf](http://www.moeller.net/binary/ver_techpapers/ver956en.pdf)

The Interaction of Contactors with PLCs [http://www.moeller.net/binary/ver\\_techpapers/ver957en.pdf](http://www.moeller.net/binary/ver_techpapers/ver957en.pdf)

Busbar Component Adapters for modern Industrial control panels [http://www.moeller.net/binary/ver\\_techpapers/ver960en.pdf](http://www.moeller.net/binary/ver_techpapers/ver960en.pdf)