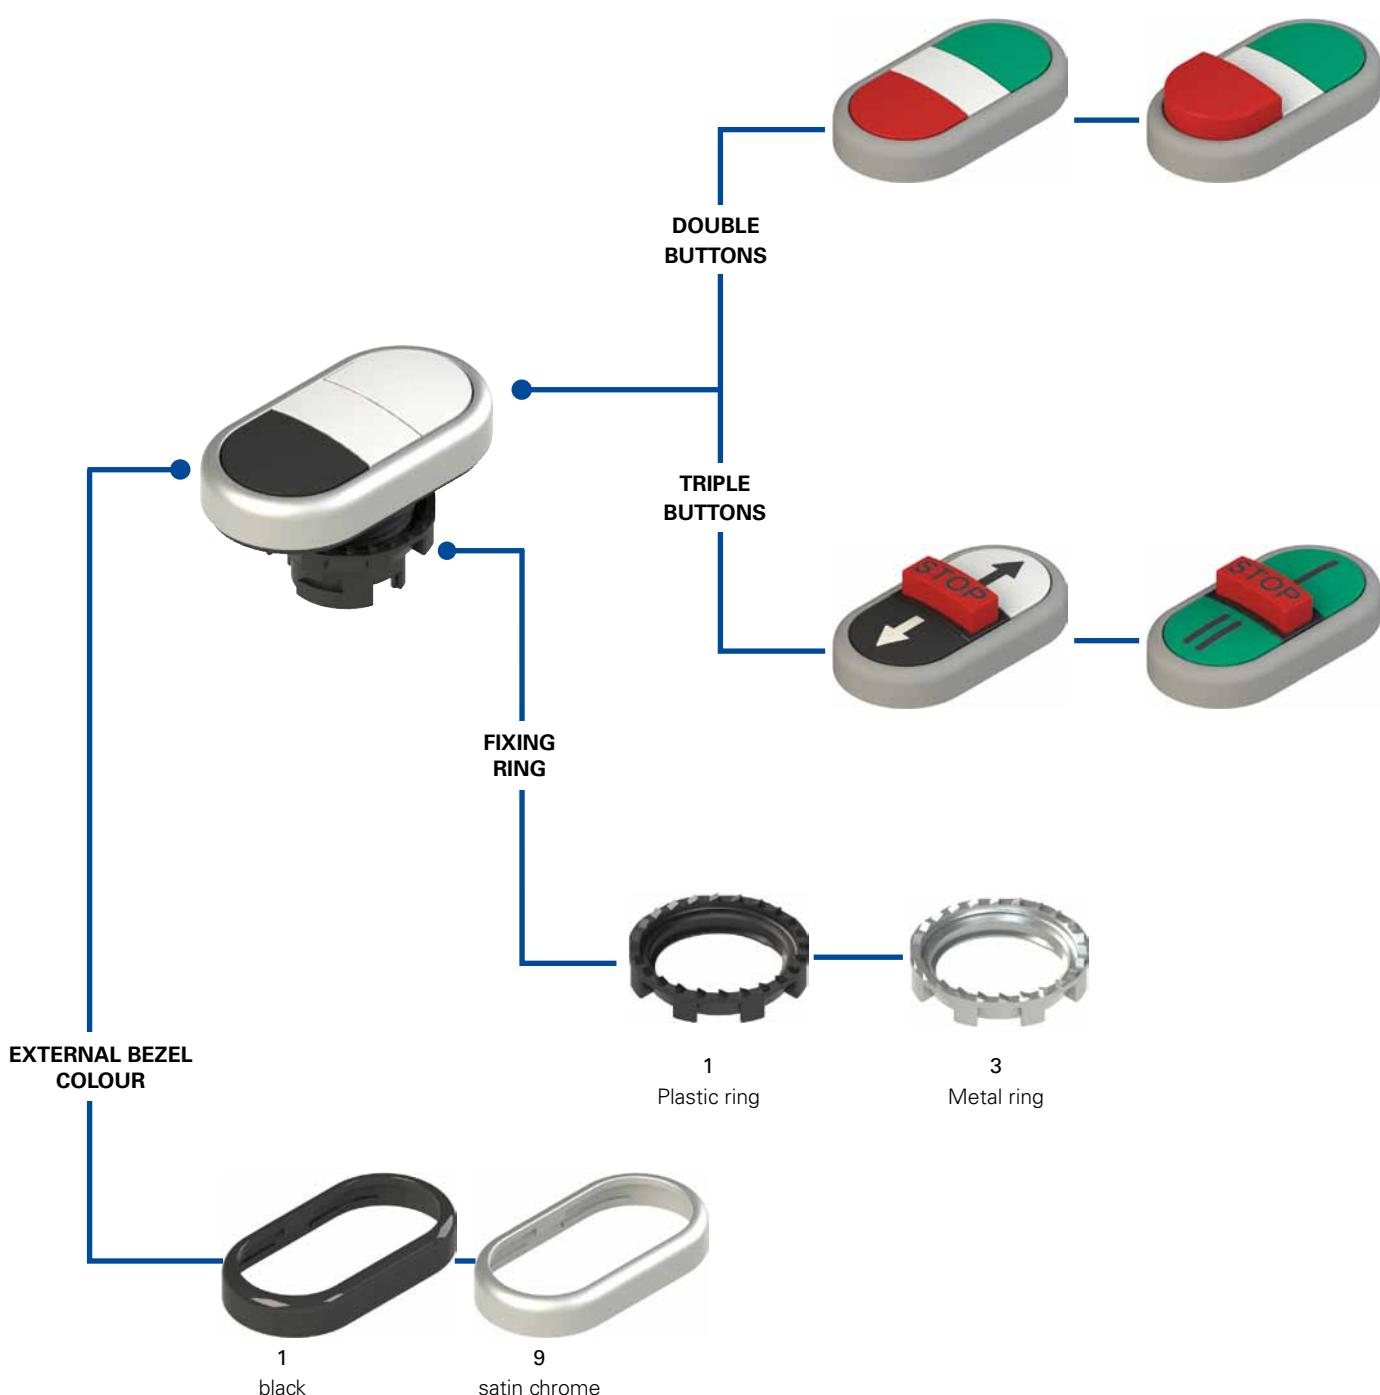


Selection diagram



Code structure**Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

E2 1PDRL10423-T6

Fixing ring and shaped ring

- | | |
|----------|-------------------------------------|
| 1 | Plastic ring (standard) |
| 2 | Plastic fixing ring and shaped ring |
| 3 | Metal ring |
| 4 | Metal fixing ring and shaped ring |

| No. of functions | |
|------------------|---------------|
| D | Double button |
| T | triple button |

Upper and lower button

- | | |
|----------|------------------------------------|
| A | upper projecting, lower flush |
| B | upper projecting, lower projecting |
| R | upper flush, lower flush |
| S | upper flush, lower projecting |

Intermediate element

- | | |
|----------|--|
| L | backlit cap (only double buttons) |
| S | projecting button (triple buttons only) |
| Q | cap and actuators for 4-slot base (double buttons only) |

Bezel colour

- | | |
|----------|-------------------------|
| 1 | black (standard) |
| 9 | satin chrome (standard) |

Ambient temperature

| | |
|-----------|----------------------------|
| | -25°C ... +80°C (standard) |
| T6 | -40°C ... +80°C |

Colours and symbols

| | upper button | | central cap | | lower button | |
|-------------|--------------|--------|-------------|--------|--------------|--------|
| | colour | symbol | colour | symbol | colour | symbol |
| 0423 | green | - | white | - | red | - |
| 0221 | white | - | white | - | black | - |
| 0222 | white | - | white | - | white | - |
| 0121 | black | - | white | - | black | - |

Other combinations on request.

| | upper button | | central cap | | lower button | |
|-------------|--------------|--------|-------------|--------|--------------|--------|
| | colour | symbol | colour | symbol | colour | symbol |
| AAAD | green | I | white | - | red | O |
| AAAP | green | START | white | - | red | STOP |
| AAAA | white | I | white | - | black | O |
| AAAN | white | START | white | - | black | STOP |
| AAAB | black | ↑ | white | - | black | ↓ |
| AAAC | black | + | white | - | black | - |

Other combinations on request.

| | upper button | | central button projecting | | lower button | |
|-------------|--------------|--------|---------------------------|--------|--------------|--------|
| | colour | symbol | colour | symbol | colour | symbol |
| AAAY | green | I | red | STOP | green | II |
| AAAZ | green | ← | red | STOP | green | → |
| AABD | white | → | red | STOP | black | ← |
| AABA | green | ↑ | red | STOP | green | ↓ |
| AABE | white | ↑ | red | STOP | black | ↓ |
| AABF | black | ↑ | red | STOP | black | ↓ |
| AABB | green | + | red | STOP | green | - |
| AABC | white | + | red | STOP | white | - |

Other combinations on request.



Technical data

General data

| | |
|---------------------------------------|--|
| Protection degree: | IP67 acc. to EN 60529 IP69K acc. to ISO 20653 |
| Ambient temperature: | -25°C ... +80°C |
| Safety parameter B_{100} : | 2,000,000 |
| Mechanical endurance: | 1 million operating cycles |
| Max. actuation frequency: | 3600 operating cycles/hour |
| Actuating force at limit of travel: | 4.4 N (without contacts) |
| Maximum travel: | 5 mm |
| Tightening torque of the fixing ring: | 2 ... 2.5 Nm |
| Utilization requirements: | See page 139 |

In compliance with standards:

IEC 60947-1, IEC 60947-5-1, IEC 60204-1, EN 60947-1, EN 60947-5-1, EN 60204-1, UL 508, CSA 22-2 No. 14

⚠ Installation for safety applications:

Use only contact blocks marked with the symbol \ominus . The safety circuit must always be connected to **NC contacts** (normally closed contacts: 1-2).

Compliance with the requirements of:

Low Voltage Directive 2014/35/EU, EMC Directive 2014/30/EU.

Positive contact opening in conformity with standards:

IEC 60947-5-1, EN 60947-5-1.

Main features

- Protection degrees IP67 and IP69K
- Version with 2 or 3 buttons
- -40°C version
- Version with central backlit cap

Quality marks:



IMQ approval: CA02.04805

UL approval: E131787

EAC approval: RU C-IT ДМ94.В.01024

Features approved by UL

For Use on a Flat Surface of a Type 1, 4X, 12 and 13

Tightening torque 2.0 Nm

General data

Button profile

In order to be used in different types of application the new EROUND line double and triple buttons are now available in two shapes: projecting and flush. The possible choice of shapes, colours and symbols allows various code combinations for buttons.

Illuminated version

For double buttons, the version with central backlit cap is available.

Metal fixing ring



The fixing ring in metal is particularly suitable for those applications which require tighter fitting of the panel-mounted device, such as for example in metal panels having holes without reference notches.

Customisable




In order to satisfy various customer requests and demands, Pizzato Elettrica offers the possibility to customize the control and signalling devices of the EROUND line: the bezels can be requested with different colours (black and satin chrome), whereas the lenses can be customized with a wide range of writings, symbols, and colours.

Protection degrees IP67 and IP69K

IP69K
IP67

These devices are designed to be used in the toughest environmental conditions and they pass the IP67 immersion test acc. to EN 60529. They can therefore be used in all environments where maximum protection degree of the housing is required. Due to their special design, these devices are suitable for use in equipment subjected to cleaning with high pressure hot water jets. These devices meet the IP69K test requirements according to ISO 20653 (water jets with 100 bar and a 80°C).

Shaped ring



The shaped ring can be used when no label holder or other devices are applied; it prevents dirt and other residues from settling between the button and the panel or housing. This turns out to be particularly useful in the sectors where high standards of cleanliness and hygiene are required.

Extended temperature range

-40°C

These devices are also available in a special version suitable for an ambient operating temperature range from -40°C up to +80°C.

They can therefore be used for applications in cold stores, sterilisers and other equipment with low temperature environments. The special materials that have been used to realize these versions, maintain unchanged their features also in these conditions, widening the installation possibilities.

Selection table for double buttons



| Actuator colour and engraving | | upper button flush central cap, flush lower button flush | | upper button flush central cap, flush lower button projecting | |
|-------------------------------|---|--|--------------------|---|--------------------|
| | | black bezel | Satin chrome bezel | black bezel | Satin chrome bezel |
| | green button white cap, illuminated red button "I" | E2 1PDRL10423 | E2 1PDRL90423 | E2 1PDSL10423 | E2 1PDSL90423 |
| | green button white cap, illuminated "O" red button "START" | E2 1PDRL1AAAD | E2 1PDRL9AAAD | E2 1PDSL1AAAD | E2 1PDSL9AAAD |
| | green button white cap, illuminated "STOP" red button | E2 1PDRL1AAAP | E2 1PDRL9AAAP | E2 1PDSL1AAAP | E2 1PDSL9AAAP |
| | white button white cap, illuminated black button "I" | E2 1PDRL10221 | E2 1PDRL90221 | E2 1PDSL10221 | E2 1PDSL90221 |
| | white button white cap, illuminated "O" black button | E2 1PDRL1AAAA | E2 1PDRL9AAAA | E2 1PDSL1AAAA | E2 1PDSL9AAAA |
| | white button white cap, illuminated "START" black button | E2 1PDRL1AAAN | E2 1PDRL9AAAN | E2 1PDSL1AAAN | E2 1PDSL9AAAN |
| | white button white cap, illuminated "STOP" black button "↑" | E2 1PDRL1AAAB | E2 1PDRL9AAAB | E2 1PDSL1AAAB | E2 1PDSL9AAAB |

Other combinations on request.

Items with code on **green** background are stock items

Selection table for triple buttons



| Actuator colour and engraving | | upper button flush central button projecting lower button flush | | Actuator colour and engraving | | upper button flush central button projecting lower button flush | |
|-------------------------------|---|---|--------------------|-------------------------------|--|---|--------------------|
| | | black bezel | Satin chrome bezel | | | black bezel | Satin chrome bezel |
| | "I" green button "STOP" red button "II" | E2 1PTRS1AAAY | E2 1PTRS9AAAY | | "↑" white button "STOP" red button "↓" | E2 1PTRS1AABE | E2 1PTRS9AABE |
| | "←" green button "STOP" red button "→" | E2 1PTRS1AAAZ | E2 1PTRS9AAAZ | | "↑" white button "STOP" red button "↓" | E2 1PTRS1AABF | E2 1PTRS9AABF |
| | "→" green button "STOP" red button "←" | E2 1PTRS1AABD | E2 1PTRS9AABD | | "+" green button "STOP" red button "-" | E2 1PTRS1AABB | E2 1PTRS9AABB |
| | "↑" green button "STOP" red button "↓" | E2 1PTRS1AABA | E2 1PTRS9AABA | | "+" green button "STOP" red button "-" | E2 1PTRS1AABC | E2 1PTRS9AABC |

Other combinations on request.

Other combinations on request.

Double and triple buttons

Complete units with double buttons



| Actuator colour and engraving | | Contacts | | | upper button flush central cap, flush lower button projecting |
|-------------------------------|----------|----------|--------|--------|---|
| | | pos. 2 | pos. 3 | pos. 1 | black bezel |
| "I" green button | | | | 1NO | |
| white cap, illuminated | | | - | | |
| "O" red button | 1NC ⊕ | | | | |

E2 AC-DXBC0625
E2 1PDSL1AAAD +
E2 1BAC11 +
E2 CP01G2V1 +
E2 CP10G2V1

Other combinations on request.

Complete units with triple buttons



| Actuator colour and engraving | | Contacts | | | upper button flush central button projecting lower button flush |
|-------------------------------|--|----------|--------|----------|---|
| | | pos. 2 | pos. 3 | pos. 1 | black bezel |
| "I" green button | | | | 1NO | |
| "STOP" red button | | | | 1NC ⊕ | |
| "I" green button | | | 1NO | | |

E2 AC-DXBC0801
E2 1PTRS1AAAY +
E2 1BAC11 +
E2 CP10G2V1 +
E2 CP01G2V1 +
E2 CP10G2V1

Other combinations on request.



| Actuator colour and engraving | | Contacts | | | upper button flush central cap, flush lower button projecting |
|-------------------------------|----------|----------|--------|--------|---|
| | | pos. 2 | pos. 3 | pos. 1 | black bezel |
| "I" green button | | | | 1NO | |
| white cap, illuminated | | | LED | | |
| "O" red button | 1NC ⊕ | | | | |

E2 AC-DXBC0602
E2 1PDSL1AAAD +
E2 1BAC11 +
E2 CP01G2V1 +
E2 LP1A2V1 +
E2 CP10G2V1

Other combinations on request.

| Protection cap | | Packs of 10 pcs. | |
|----------------|---|-------------------------|--------------------------------|
| Article | Description | Article | Description |
| VE CA1C1 | Protection cap for double and triple projecting buttons | VE CA1D1 | Shroud for double flush button |
| | | | |

With the shroud it is not possible to apply the shaped ring

Items with code on **green** background are stock items

Shaped ring



| Article | Description |
|------------|--|
| VE GP12L1A | Shaped ring for double and triple button E2 •PD•••••••• E2 •PT•••••••• |

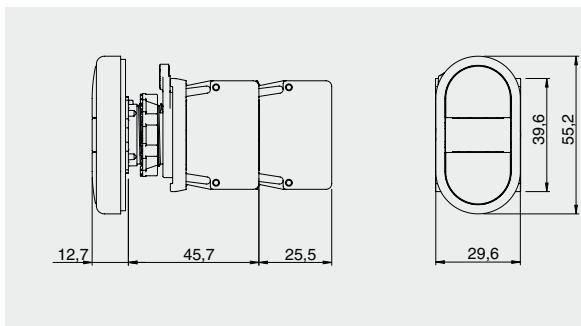
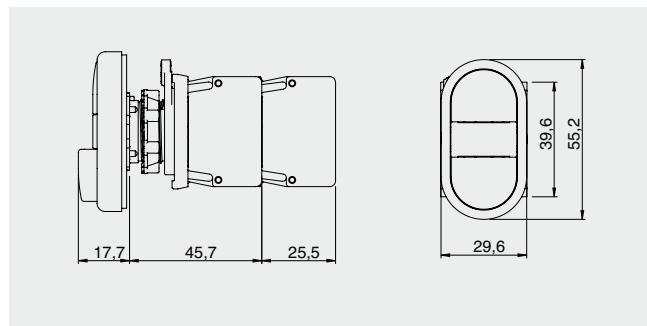
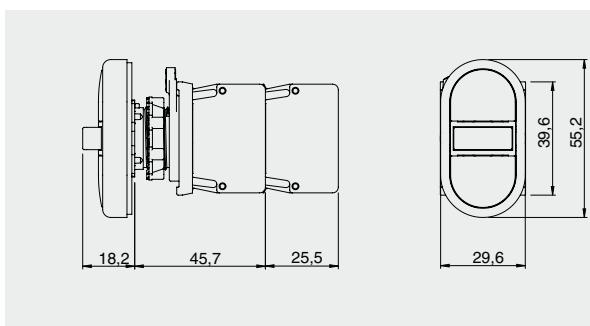
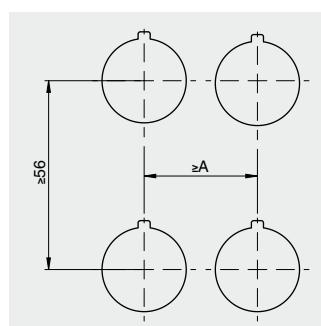
With the shaped ring it is not possible to apply the shroud

Accessories

→ More ACCESSORIES on page 135

Dimensions

All measures in the drawings are in mm

Flush double button**Projecting double button****Triple button****Minimum distances for installation**

→ The 2D and 3D files are available at www.pizzato.com

Maximum number of contact blocks