

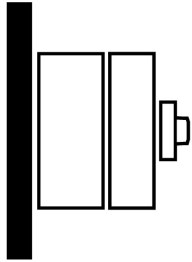
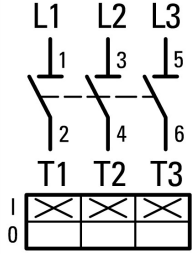



**Main switch, 3 pole, 25 A, Emergency-Stop function, Lockable in the 0 (Off) position, surface mounting**

**Part no. P1-25/I2/SVB**  
**Catalog No. 207293**

**EL-Nummer (Norway) 0001457888**

**Delivery program**

|  |                |     |  |
|--|----------------|-----|--|
| Product range                                      |                |     | Main switch<br>maintenance switch<br>Repair switch                                   |
| Part group reference                               |                |     | P1   |
| Stop Function                                      |                |     | Emergency switching off function   |
| Information about equipment supplied               |                |     | With red rotary handle and yellow locking ring                                       |
| Number of poles                                    |                |     | 3 pole   |
| <b>Auxiliary contacts</b>                          |                |     |  |
|  |                | N/O | 0  |
|  |                | N/C | 0  |
| Locking facility                                   |                |     | Lockable in the 0 (Off) position   |
| Degree of Protection                               |                |     | IP65   |
|  |                |     | <b>totally insulated</b>   |
| Design   |                |     | surface mounting   |
|  |                |     |  |
| Contact sequence                                   |                |     |  |
| Switching angle                                    |                | °   | 90   |
| Function   |                |     |  |
| <b>Motor rating AC-23A, 50 - 60 Hz</b>             |                |     |  |
| 400 V  | P              | kW  | 11   |
| Rated uninterrupted current                        | I <sub>u</sub> | A   | 25   |
| Note on rated uninterrupted current I <sub>u</sub> |                |     | Rated uninterrupted current I <sub>u</sub> is specified for max. cross-section.      |

## Technical data

### General

|                                       |           |      |   |
|---------------------------------------|-----------|------|---|
| Standards                             |           |      | IEC/EN 60947, VDE 0660, IEC/EN 60204<br>Switch-disconnector according to IEC/EN 60947-3 |
| Climatic proofing                     |           |      | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30          |
| Ambient temperature                   |           |      |   |
| Enclosed                              |           | °C   | -25 - +40   |
| Overtoltage category/pollution degree |           |      | III/3   |
| Rated impulse withstand voltage       | $U_{imp}$ | V AC | 6000  |
| Mechanical shock resistance           |           | g    | 15  |
| Mounting position                     |           |      | As required   |

### Contacts

|   |          |           |  |
|---|----------|-----------|--|
| Mechanical variables                                |          |           |  |
| Number of poles                                     |          |           | 3 pole   |
| Auxiliary contacts                                  |          |           |  |
|   |          | N/O       | 0  |
|   |          | N/C       | 0  |
| Electrical characteristics                          |          |           |  |
| Rated operational voltage                           | $U_e$    | V AC      | 690  |
| Rated uninterrupted current                         | $I_u$    | A         | 25   |
| Note on rated uninterrupted current $I_u$           |          |           | Rated uninterrupted current $I_u$ is specified for max. cross-section. |
| Load rating with intermittent operation, class 12   |          |           |  |
| AB 25 % DF  |          | x $I_e$   | 2  |
| AB 40 % DF  |          | x $I_e$   | 1.6  |
| AB 60 % DF  |          | x $I_e$   | 1.3  |
| Short-circuit rating                                |          |           |  |
| Fuse  |          | A gG/gL   | 25   |
| Rated short-time withstand current (1 s current)    | $I_{cw}$ | $A_{rms}$ | 640  |
| Note on rated short-time withstand current $I_{cw}$ |          |           | Current for a time of 1 second   |
| Rated conditional short-circuit current             | $I_q$    | kA        | 50   |

### Switching capacity

|   |              |          |       |
|---|--------------|----------|-------|
| $\cos \varphi$ rated making capacity as per IEC 60947-3 |              | A        | 240   |
| Rated breaking capacity $\cos \varphi$ to IEC 60947-3   |              | A        |       |
| 230 V   |              | A        | 190   |
| 400/415 V   |              | A        | 150   |
| 500 V   |              | A        | 170   |
| 690 V   |              | A        | 150   |
| Safe isolation to EN 61140                              |              |          |       |
| between the contacts                                    |              | V AC     | 440   |
| Current heat loss per contact at $I_e$                  |              | W        | 1.1   |
| Lifespan, mechanical                                    | Operations   | x $10^6$ | > 0.3 |
| Maximum operating frequency                             | Operations/h |          | 1200  |
| AC  |              |          |       |
| AC-3  |              |          |       |
| Rating, motor load switch                               | P            | kW       |       |
| 220 V 230 V   | P            | kW       | 5.5   |
| 400 V 415 V   | P            | kW       | 7.5   |
| 500 V   | P            | kW       | 7.5   |
| 690 V   | P            | kW       | 7.5   |
| Rated operational current motor load switch             |              |          |       |
| 230 V   | $I_e$        | A        | 19.6  |
| 400V 415 V  | $I_e$        | A        | 15.2  |
| 500 V   | $I_e$        | A        | 12.1  |
| 690 V   | $I_e$        | A        | 8.8   |

|   |                   |                |   |
|---|-------------------|----------------|---|
| AC-21A  |                   |                |   |
| Rated operational current switch              |                   |                |   |
| 440 V   | I <sub>e</sub>    | A              | 25  |
| AC-23A  |                   |                |   |
| Motor rating AC-23A, 50 - 60 Hz               |                   |                |   |
| 230 V   | P                 | kW             | 5.5   |
| 400 V 415 V                                   | P                 | kW             | 11  |
| 500 V   | P                 | kW             | 11  |
| 690 V   | P                 | kW             | 11  |
| Rated operational current motor load switch   |                   |                |   |
| 230 V   | I <sub>e</sub>    | A              | 25  |
| 400 V 415 V                                   | I <sub>e</sub>    | A              | 25  |
| 500 V   | I <sub>e</sub>    | A              | 17.4  |
| 690 V   | I <sub>e</sub>    | A              | 12.6  |
| DC  |                   |                |   |
| DC-1, Load-break switches L/R = 1 ms          |                   |                |   |
| Rated operational current                     | I <sub>e</sub>    | A              | 25  |
| Voltage per contact pair in series            |                   | V              | 60  |
| DC-23A, motor load switch L/R = 15 ms         |                   |                |   |
| 24 V  |                   |                |   |
| Rated operational current                     | I <sub>e</sub>    | A              | 25  |
| Contacts                                      |                   | Quantity       | 1   |
| 48 V  |                   |                |   |
| Rated operational current                     | I <sub>e</sub>    | A              | 25  |
| Contacts                                      |                   | Quantity       | 2   |
| 60 V  |                   |                |   |
| Rated operational current                     | I <sub>e</sub>    | A              | 25  |
| Contacts                                      |                   | Quantity       | 2   |
| 120 V   |                   |                |   |
| Rated operational current                     | I <sub>e</sub>    | A              | 12  |
| Contacts                                      |                   | Quantity       | 3   |
| Control circuit reliability at 24 V DC, 10 mA | Fault probability | H <sub>F</sub> | < 10 <sup>-5</sup> , < 1 fault in 100000 operations |

### Terminal capacities

|                                      |  |                 |                                |
|--------------------------------------|--|-----------------|--------------------------------|
| Solid or stranded                    |  | mm <sup>2</sup> | 1 x (1,5 - 6)<br>2 x (1,5 - 6) |
| Flexible with ferrules to DIN 46228  |  | mm <sup>2</sup> | 1 x (1 - 4)<br>2 x (1 - 4)     |
| Terminal screw                       |  |                 | M4                             |
| Tightening torque for terminal screw |  | Nm              | 1.6                            |

### Technical safety parameters:

|              |  |  |   |
|--------------|--|--|---|
| <b>Notes</b> |  |  | B10 <sub>q</sub> values as per EN ISO 13849-1, table C1 |
|--------------|--|--|---|

### Rating data for approved types

|                   |  |       |        |
|-------------------|--|-------|--------|
| Terminal capacity |  |       |        |
| Terminal screw    |  |       | M4     |
| Tightening torque |  | lb-in | 14.128 |

## Design verification as per IEC/EN 61439

|  |                   |    |     |
|--|-------------------|----|-----|
| Technical data for design verification                   |                   |    |     |
| Rated operational current for specified heat dissipation | I <sub>n</sub>    | A  | 25  |
| Heat dissipation per pole, current-dependent             | P <sub>vid</sub>  | W  | 1.1 |
| Equipment heat dissipation, current-dependent            | P <sub>vid</sub>  | W  | 0   |
| Static heat dissipation, non-current-dependent           | P <sub>vs</sub>   | W  | 0   |
| Heat dissipation capacity                                | P <sub>diss</sub> | W  | 0   |
| Operating ambient temperature min.                       |                   | °C | -25 |
| Operating ambient temperature max.                       |                   | °C | 40  |

|  |  |  |
|--|--|--|
| IEC/EN 61439 design verification   |  |  |
| 10.2 Strength of materials and parts   |  |  |
| 10.2.2 Corrosion resistance  |  | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |  | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |  | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |  | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |  | UV resistance only in connection with protective shield.   |
| 10.2.5 Lifting   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |  | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |  | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |  | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |  | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |  |  |
| 10.9.2 Power-frequency electric strength   |  | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |  | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |  | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |  | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0

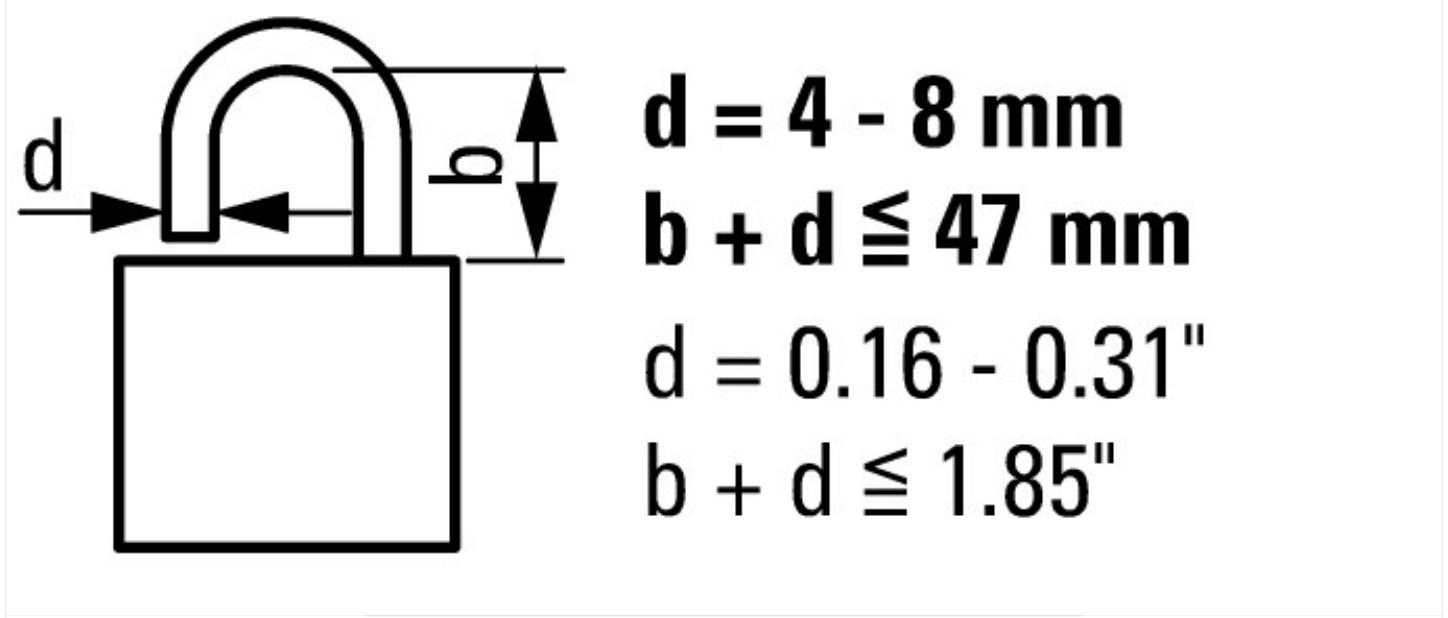
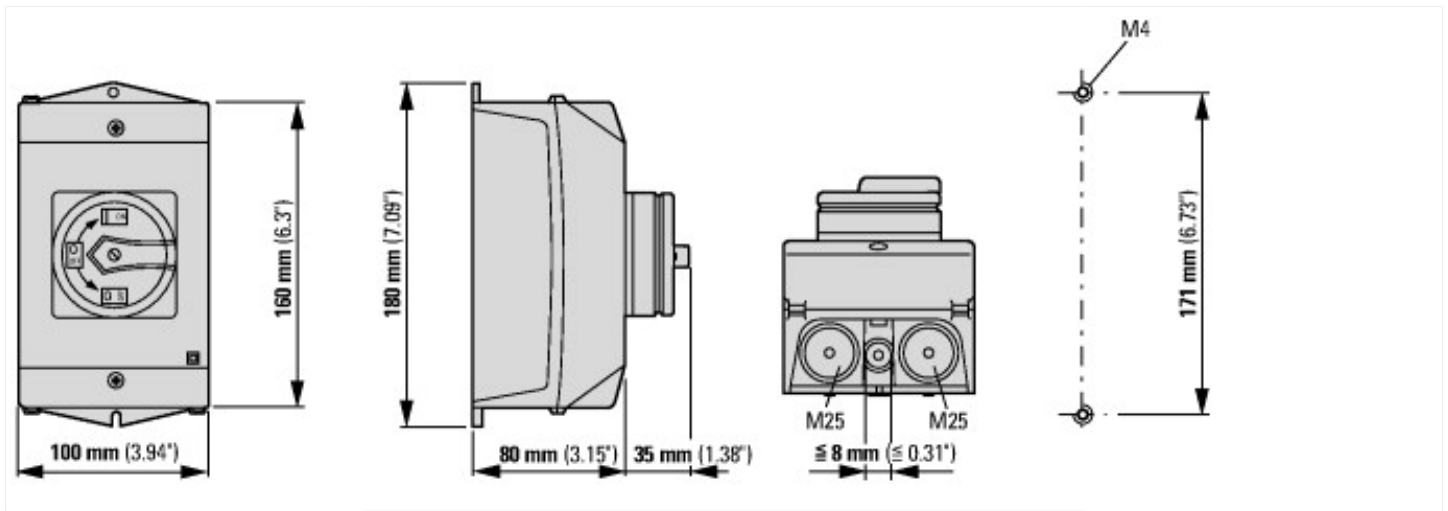
|   |    |  |                            |
|---|----|--|----------------------------|
| Low-voltage industrial components (EG000017) / Switch disconnecter (EC000216)   |    |  |                            |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Switch disconnecter (ecl@ss10.0.1-27-37-14-03 [AKF060013]) |    |  |                            |
| Version as main switch  |    |  | Yes                        |
| Version as maintenance-/service switch  |    |  | Yes                        |
| Version as safety switch  |    |  | Yes                        |
| Version as emergency stop installation  |    |  | Yes                        |
| Version as reversing switch   |    |  | No                         |
| Number of switches  |    |  | 1                          |
| Max. rated operation voltage U <sub>e</sub> AC  | V  |  | 690                        |
| Rated operating voltage   | V  |  | 690 - 690                  |
| Rated permanent current I <sub>u</sub>  | A  |  | 25                         |
| Rated permanent current at AC-23, 400 V   | A  |  | 25                         |
| Rated permanent current at AC-21, 400 V   | A  |  | 25                         |
| Rated operation power at AC-3, 400 V  | kW |  | 7.5                        |
| Rated short-time withstand current I <sub>cw</sub>  | kA |  | 0.64                       |
| Rated operation power at AC-23, 400 V   | kW |  | 13                         |
| Switching power at 400 V  | kW |  | 13                         |
| Conditioned rated short-circuit current I <sub>q</sub>  | kA |  | 80                         |
| Number of poles   |    |  | 3                          |
| Number of auxiliary contacts as normally closed contact   |    |  | 0                          |
| Number of auxiliary contacts as normally open contact   |    |  | 0                          |
| Number of auxiliary contacts as change-over contact   |    |  | 0                          |
| Motor drive optional  |    |  | No                         |
| Motor drive integrated  |    |  | No                         |
| Voltage release optional  |    |  | No                         |
| Device construction   |    |  | Complete device in housing |

|   |  |                            |
|---|--|----------------------------|
| Suitable for ground mounting                  |  | Yes                        |
| Suitable for front mounting 4-hole            |  | No                         |
| Suitable for front mounting centre            |  | No                         |
| Suitable for distribution board installation  |  | No                         |
| Suitable for intermediate mounting            |  | No                         |
| Colour control element                        |  | Red                        |
| Type of control element                       |  | Door coupling rotary drive |
| Interlockable                                 |  | Yes                        |
| Type of electrical connection of main circuit |  | Screw connection           |
| Degree of protection (IP), front side         |  | IP65                       |
| Degree of protection (NEMA)                   |  | Other                      |

## Approvals

|                             |  |  |
|-----------------------------|--|--|
| North America Certification |  | For UL/CSA certification order article number 255886 |
|-----------------------------|--|--|

## Dimensions



$\leq 3$  padlocks

## Additional product information (links)

|  |   |
|--|---|
| <b>IL03802001Z (AWA1150-1689) Switch-Disconnectors in insulated enclosures</b> |   |
| IL03802001Z (AWA1150-1689) Switch-Disconnectors in insulated enclosures        | <a href="ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03802001Z2018_04.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03802001Z2018_04.pdf</a> |
| Technical overview cam switch, switch-disconnector                             | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.2">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.2</a>           |
| System overview cam switch T   | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.4">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.4</a>           |
| System overview switch-disconnector P  | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.6">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.6</a>           |

|  |   |
|--|---|
| Key to part numbers Cam switch                               | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.8">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.8</a>                                     |
| Key to part numbers Switch-disconnector                      | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.8">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.8</a>                                     |
| Switches for ATEX  | <a href="http://www.coopercrouse-hinds.eu/en/products/25-ex-safety-and-main-current-switches.html">http://www.coopercrouse-hinds.eu/en/products/25-ex-safety-and-main-current-switches.html</a> |
| Ordering form for SOND switches and SOND front plates(DE_EN) | <a href="ftp://ftp.moeller.net/DOCUMENTATION/PDF/MZ008005ZU_Orderform_Customized_Switch.pdf">ftp://ftp.moeller.net/DOCUMENTATION/PDF/MZ008005ZU_Orderform_Customized_Switch.pdf</a>             |
| Ordering form for SOND switches and SOND front plates(DE_EN) | <a href="ftp://ftp.moeller.net/DOCUMENTATION/PDF/MZ008006ZU_Orderform_Customized_Switch.pdf">ftp://ftp.moeller.net/DOCUMENTATION/PDF/MZ008006ZU_Orderform_Customized_Switch.pdf</a>             |