



**I/O expansion, For use with easyE4, 24 V DC, Inputs/Outputs expansion (number) digital: 4, screw terminal**



**Part no. EASY-E4-DC-8TE1**  
**Catalog No. 197219**

**EL-Nummer (Norway) 4500552**

## Delivery program

Product range			Control relays easyE4
Subrange			I/O expansions digital
Basic function			easyE4 extensions
Description			Input/output extension for easyE4 control relay Expandable with the easyE4 series of digital input/output expansions with easy-E4-CONNECT1 connector (Item Y7-197225) Rated operating voltage 24V DC Digital inputs: 4 Digital outputs: 4 transistor Screw terminals
<b>Inputs</b>			
Inputs expansion (number)			digital: 4
<b>Outputs</b>			
Transistor			4
<b>Additional features</b>			
Software			EASYSOFT-SWLIC/easySoft 7
Supply voltage			24 V DC
For use with			easyE4

## Technical data

### General

Standards			EN 61000-6-2 EN 61000-6-3 IEC 60068-2-6 IEC 60068-2-27 IEC 60068-2-30 IEC 61131-2 EN 61010 EN 50178
Dimensions (W x H x D)		mm	35.5 x 90 x 58
Weight		kg	0.2
Mounting			Top-hat rail IEC/EN 60715, 35 mm or screw fixing using fixing brackets ZB4-101-GF1 (accessories)
Connection type			Screw terminal

### Terminal capacities

Screw terminals			
Solid		mm <sup>2</sup>	0.2/4 (AWG 22 - 12)
Flexible with ferrule		mm <sup>2</sup>	0.2 - 2.5
Standard screwdriver		mm	3.5 x 0.8
Max. tightening torque		Nm	0.6

### Climatic environmental conditions

Operating ambient temperature		°C	-25 to 55, cold as per IEC 60068-2-1, heat as per IEC 60068-2-2
Condensation			Take appropriate measures to prevent condensation
Storage	9	°C	-40 - +70
relative humidity		%	in accordance with IEC 60068-2-30, IEC 60068-2-78 5 - 95
Air pressure (operation)		hPa	795 - 1080

### Ambient conditions, mechanical

Protection type (IEC/EN 60529, EN50178, VBG 4)			IP20
Vibrations		Hz	In accordance with IEC 60068-2-6 constant amplitude 0.15 mm: 10 - 57 constant acceleration 2 g: 57 - 150

Mechanical shock resistance (IEC/EN 60068-2-27) semi-sinusoidal 15 g/11 ms		Impacts	18
Drop to IEC/EN 60068-2-31	Drop height	mm	50
Free fall, packaged (IEC/EN 60068-2-32)		m	0.3
Mounting position			Vertical or horizontal

## Electromagnetic compatibility (EMC)

Overvoltage category/pollution degree			III/2
Electrostatic discharge (ESD)			
applied standard			according to IEC EN 61000-4-2
Air discharge		kV	8
Contact discharge		kV	6
Electromagnetic fields (RFI) to IEC EN 61000-4-3		V/m	0.8 - 1.0 GHz: 10 1.4 - 2 GHz: 3 2.0 - 2.7 GHz: 1
Radio interference suppression			EN 61000-6-3 Class B
Burst		kV	according to IEC/EN 61000-4-4 Supply cables: 2 Signal cables: 2
power pulses (Surge)			according to IEC/EN 61000-4-5 0.5 kV (supply cables, symmetrical) 1 kV (supply cables, asymmetrical)
Immunity to line-conducted interference to (IEC/EN 61000-4-6)		V	10

## Insulation resistance

Clearance in air and creepage distances			nach EN 50178, EN 61010-2-201, UL61010-2-201, CSA-C22.2 NO. 61010-2-201
Insulation resistance			in accordance with EN 50178, EN 61010-2-201, UL61010-2-201, CSA-C22.2 NO. 61010-2-201

## Power supply

Rated operational voltage	U <sub>e</sub>	V	24 DC (-15/+20%)
Permissible range	U <sub>e</sub>		20.4 - 28.8 V DC
Residual ripple		%	≤ 5
Siemens MPI, (optional)			yes
Input current			max. 40 mA at U <sub>e</sub>
Voltage dips		ms	≤ 10
Fuse		A	≥ 2.5A (T)
Heat dissipation at 24 V DC		W	1

## Digital inputs 24 V DC

Number			4
Potential isolation			from power supply: no between inputs: no from the outputs: no to expansion devices: yes to base unit: yes
Rated operational voltage	U <sub>e</sub>	V DC	24
Input voltage		V DC	Signal 0: ≤ 5 (I1 - I4) Signal 1: ≥ 15 (I1 - I4)
Input current at signal 1		mA	3.3 (I1 - I4)
Deceleration time		ms	type 0.1 (0 -> 1) type 0.2 (1 -> 0)
Cable length		m	100 (unshielded)

## Transistor outputs

Number			4
Rated operational voltage	U <sub>e</sub>	V DC	24
Permissible range	U <sub>e</sub>		20.4 - 28.8 V DC
Residual ripple		%	5
Siemens MPI, (optional)			Yes (Caution: A short circuit will occur if a supply voltage of the wrong polarity is applied to the outputs.)
Potential isolation			from power supply: no between the inputs: no to the outputs: no to base unit: yes to expansion devices: yes
Rated operational current at signal „1“ DC per channel	I <sub>e</sub>	A	Max. 0.5
Residual current on 0 signal per channel		mA	< 0.005
Max. output voltage		V	1 (at status 0 per channel) U = U <sub>e</sub> - 1 V (signal 1 at I <sub>e</sub> = 0.5 A)

Short-circuit protection			yes, electronic (Q1 - Q4)
Short-circuit tripping current for $R_a \leq 10 \text{ m}\Omega$		A	$0.7 \leq I_a \leq 1.7$ per output depending on number of active channels and their load
Total short-circuit current		A	6.8
Thermal cutout			Yes
Max. operating frequency with constant resistive load		Operation h	abhängig von der Zykluszeit des Basisgeräts und bei Erweiterungsgeräten auch von deren Übertragszeit
Parallel connection of outputs			
With resistive load, inductive load with external suppressor circuit, combination within a group			Group 1: Q1 to Q4
Number of outputs	max.		4
Max. total current		A	2
Inductive load to EN 60947-5-1			
Without external suppressor circuit			
DC-13, $T_{0.95} = 72 \text{ ms}$ , $R = 48 \Omega$ , $L = 1.15 \text{ H}$			
Utilization factor		g	0.25
Duty factor		% DF	100
$T_{0.95} = 15 \text{ ms}$ , $R = 48 \Omega$ , $L = 0.24 \text{ H}$			
Utilization factor		g	0.25
Duty factor		% DF	100
With external suppressor circuit			
Utilization factor		g	1
Duty factor		% DF	100
Max. switching frequency, max. duty factor		Operation	Depending on the suppressor circuit

## Design verification as per IEC/EN 61439

Technical data for design verification			
Static heat dissipation, non-current-dependent	$P_{VS}$	W	1
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	55
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Meets the product standard's requirements.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

## Technical data ETIM 7.0


PLC's (EG000024) / Logic module (EC001417)		
Electric engineering, automation, process control engineering / Control / Programmable logic control (SPS) / Logic module (ecl@ss10.0.1-27-24-22-16 [AKE539014])		
Supply voltage AC 50 Hz	V	0 - 0
Supply voltage AC 60 Hz	V	0 - 0
Supply voltage DC	V	20.4 - 28.8
Voltage type of supply voltage		DC
Voltage type of supply voltage		DC
Switching current	A	0.5
Number of analogue inputs		0
Number of analogue outputs		0
Number of digital inputs		4
Number of digital outputs		4
With relay output		No
Number of HW-interfaces industrial Ethernet		0
Number of interfaces PROFINET		0
Number of HW-interfaces RS-232		0
Number of HW-interfaces RS-422		0
Number of HW-interfaces RS-485		0
Number of HW-interfaces serial TTY		0
Number of HW-interfaces USB		0
Number of HW-interfaces parallel		0
Number of HW-interfaces Wireless		0
Number of HW-interfaces other		2
With optical interface		No
Supporting protocol for TCP/IP		No
Supporting protocol for PROFIBUS		No
Supporting protocol for CAN		No
Supporting protocol for INTERBUS		No
Supporting protocol for ASI		No
Supporting protocol for KNX		No
Supporting protocol for MODBUS		No
Supporting protocol for Data-Highway		No
Supporting protocol for DeviceNet		No
Supporting protocol for SUCONET		No
Supporting protocol for LON		No
Supporting protocol for PROFINET IO		No
Supporting protocol for PROFINET CBA		No
Supporting protocol for SERCOS		No
Supporting protocol for Foundation Fieldbus		No
Supporting protocol for EtherNet/IP		No
Supporting protocol for AS-Interface Safety at Work		No
Supporting protocol for DeviceNet Safety		No
Supporting protocol for INTERBUS-Safety		No
Supporting protocol for PROFI-safe		No
Supporting protocol for SafetyBUS p		No
Supporting protocol for other bus systems		No
Radio standard Bluetooth		No
Radio standard WLAN 802.11		No
Radio standard GPRS		No
Radio standard GSM		No
Radio standard UMTS		No
IO link master		No
Redundancy		No
With display		No

Degree of protection (IP)			IP20
Basic device			No
Expandable			Yes
Expansion device			Yes
With timer			No
Rail mounting possible			Yes
Wall mounting/direct mounting			Yes
Front build in possible			Yes
Rack-assembly possible			No
Suitable for safety functions			No
Category according to EN 954-1			-
SIL according to IEC 61508			None
Performance level acc. EN ISO 13849-1			None
Appendant operation agent (Ex ia)			No
Appendant operation agent (Ex ib)			No
Explosion safety category for gas			None
Explosion safety category for dust			None
Width		mm	35.5
Height		mm	90
Depth		mm	58

## Approvals

Degree of Protection			IEC: IP20, UL/CSA Type: -
----------------------	--	--	---------------------------

## Dimensions

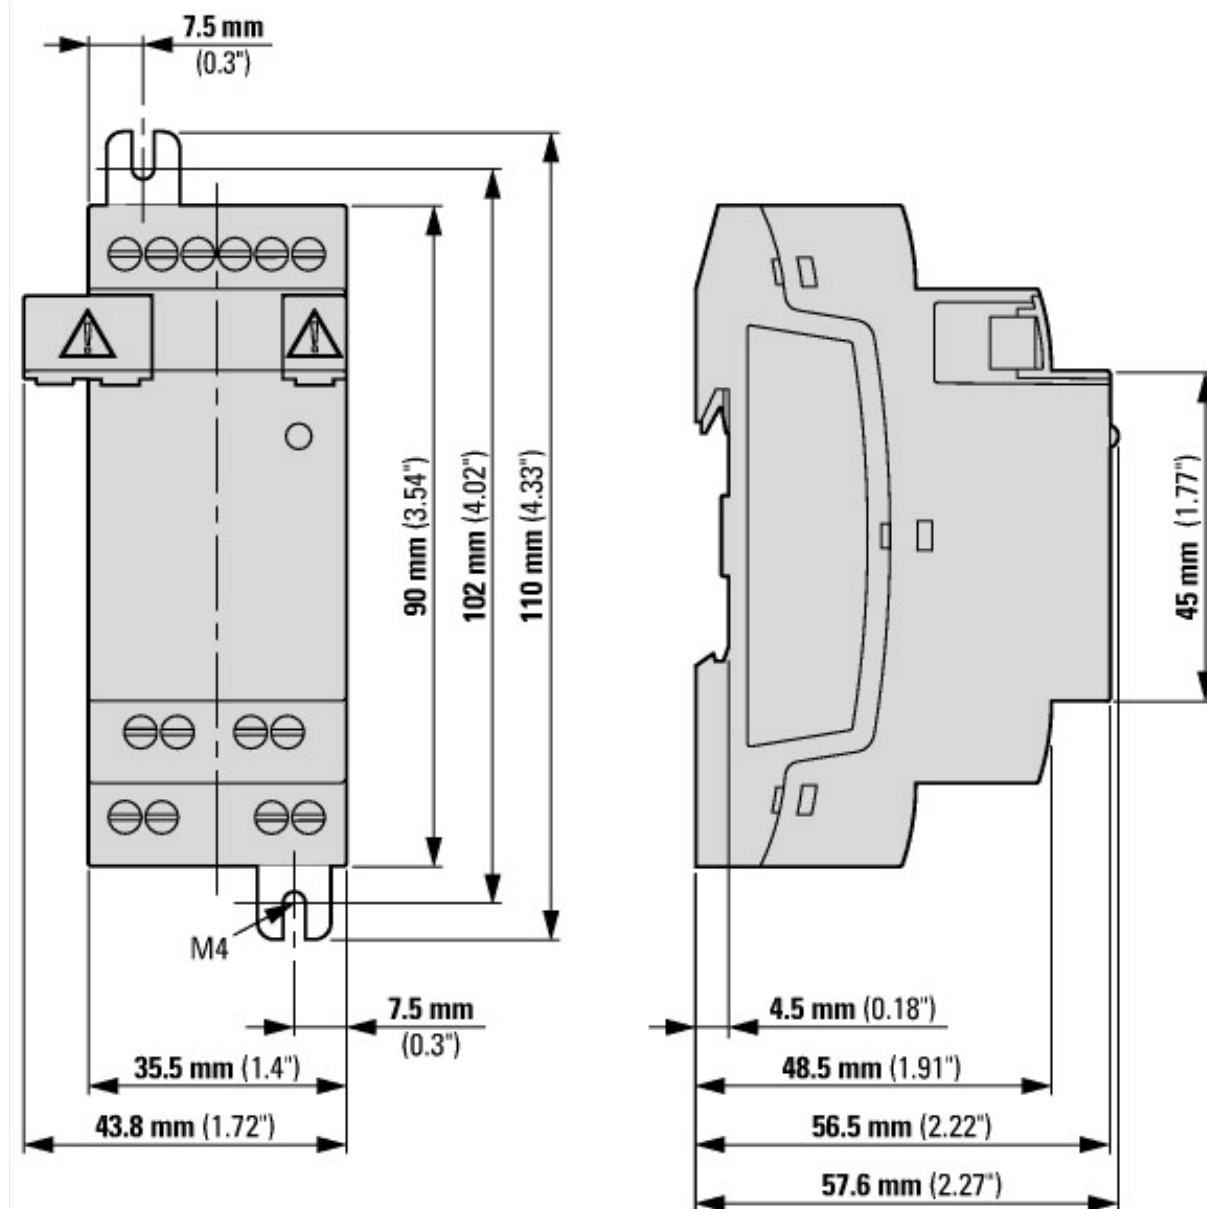

## Assets (links)

### Declaration of CE Conformity

00003148

## Additional product information (links)

<b>assembly instructions easyE4 IL050021ZU</b>	
assembly instructions easyE4 IL050021ZU	<a href="ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL050021ZU2019_02.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL050021ZU2019_02.pdf</a>
<b>easyE4 (MN050009) manual</b>	
easyE4 – Handbuch (MN050009) - Deutsch	<a href="ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050009_DE.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050009_DE.pdf</a>
easyE4 (MN050009) manual - English	<a href="ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050009_EN.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050009_EN.pdf</a>