



**Control relays, easyE4 (expandable, Ethernet), 24 V DC, Inputs Digital: 8, of which can be used as analog: 4, Outputs Digital: 4 transistor, screw terminal**



**Part no. EASY-E4-DC-12TC1**  
**Catalog No. 197213**

**EL-Nummer 4500548**  
**(Norway)**

**Delivery program**

|                                |  |  |  |
|--------------------------------|--|--|--|
| Basic function                 |  |  | easyE4 basic device  |
| Description                    |  |  | Electronic control relay with display with Ethernet interface<br>Expandable with the easyE4 series of digital input/output expansions with easy-E4-CONNECT1 connector (Item Y7-197225)<br>Rated operating voltage 24V DC<br>8 digital inputs, No. of these can be used as analog inputs - 4<br>Digital outputs: 4 transistor<br>Screw terminals<br>Delivery with customized user program is possible via Item (Y7) -2010781 EASY-COMBINATION |
| <b>Inputs</b>                  |  |  |  |
| Digital                        |  |  | 8  |
| of which can be used as analog |  |  | 4  |
| <b>Additional features</b>     |  |  |  |
| Real time clock                |  |  | #  |
| Display & keypad               |  |  | #  |
| Expansions                     |  |  | Expandable networkable (Ethernet)  |
| Supply voltage                 |  |  | 24 V DC  |
| Software                       |  |  | EASYSOFT-SWLIC/easySoft 7  |

**Technical data**

**General**

|                        |  |    |  |
|------------------------|--|----|--|
| Standards              |  |    | EN 61000-6-2<br>EN 61000-6-3<br>IEC 60068-2-6<br>IEC 60068-2-27<br>IEC 60068-2-30<br>IEC 61131-2<br>EN 61010<br>EN 50178 |
| Dimensions (W x H x D) |  | mm | 71.5 x 90 x 58   |
| Weight                 |  | kg | 0.2  |
| Mounting               |  |    | Top-hat rail IEC/EN 60715, 35 mm or screw fixing using fixing brackets ZB4-101-GF1 (accessories)                         |
| Connection type        |  |    | screw terminal   |
| Ethernet               |  |    |  |
| Connections            |  |    | RJ45 plug, 8-pin   |
| Cable                  |  |    | CAT5   |

**Terminal capacities**

|                        |  |                 |                     |
|------------------------|--|-----------------|---------------------|
| Screw terminals        |  |                 |                     |
| Solid                  |  | mm <sup>2</sup> | 0.2/4 (AWG 22 - 12) |
| Flexible with ferrule  |  | mm <sup>2</sup> | 0.2 - 2.5           |
| Standard screwdriver   |  | mm              | 3.5 x 0.8           |
| Max. tightening torque |  | Nm              | 0.6                 |

**Display**

|                    |  |  |            |
|--------------------|--|--|------------|
| Display - Type     |  |  | Monochrome |
| Lines x characters |  |  | 6 x 16     |

**Climatic environmental conditions**

|                               |  |    |   |
|-------------------------------|--|----|---|
| Operating ambient temperature |  | °C | -25 to 55, cold as per IEC 60068-2-1, heat as per IEC 60068-2-2 |
| Condensation                  |  |    | Take appropriate measures to prevent condensation               |

|                               |   |     |   |
|-------------------------------|---|-----|---|
| LCD display (clearly legible) |   | °C  | 0 - 55  |
| Storage                       | 9 | °C  | -40 - +70   |
| relative humidity             |   | %   | in accordance with IEC 60068-2-30, IEC 60068-2-78<br>5 - 95 |
| Air pressure (operation)      |   | hPa | 795 - 1080  |

### Ambient conditions, mechanical

|  |             |         |  |
|--|-------------|---------|--|
| Protection type (IEC/EN 60529, EN50178, VBG 4)                             |             |         | IP20   |
| Vibrations   |             | Hz      | In accordance with IEC 60068-2-6<br>constant amplitude 0.15 mm: 10 - 57<br>constant acceleration 2 g: 57 - 150 |
| Mechanical shock resistance (IEC/EN 60068-2-27) semi-sinusoidal 15 g/11 ms |             | Impacts | 18   |
| Drop to IEC/EN 60068-2-31  | Drop height | mm      | 50   |
| Free fall, packaged (IEC/EN 60068-2-32)                                    |             | m       | 0.3  |
| Mounting position  |             |         | Vertical or horizontal   |


### Electromagnetic compatibility (EMC)

|   |  |     |  |
|---|--|-----|--|
| Overvoltage category/pollution degree                         |  |     | III/2  |
| Electrostatic discharge (ESD)                                 |  |     |  |
| applied standard  |  |     | according to IEC EN 61000-4-2  |
| Air discharge   |  | kV  | 8  |
| Contact discharge   |  | kV  | 6  |
| Electromagnetic fields (RFI) to IEC EN 61000-4-3              |  | V/m | 0.8 - 1.0 GHz: 10<br>1.4 - 2 GHz: 3<br>2.0 - 2.7 GHz: 1  |
| Radio interference suppression                                |  |     | EN 61000-6-3 Class B   |
| Burst   |  | kV  | according to IEC/EN 61000-4-4<br>Supply cables: 2<br>Signal cables: 2                                      |
| power pulses (Surge)  |  |     | according to IEC/EN 61000-4-5<br>0.5 kV (supply cables, symmetrical)<br>1 kV (supply cables, asymmetrical) |
| Immunity to line-conducted interference to (IEC/EN 61000-4-6) |  | V   | 10   |

### Insulation resistance

|   |  |  |   |
|---|--|--|---|
| Clearance in air and creepage distances |  |  | nach EN 50178, EN 61010-2-201, UL61010-2-201, CSA-C22.2 NO. 61010-2-201 |
| Insulation resistance                   |  |  | per EN 50178, EN 61010-2-201, UL61010-2-201, CSA-C22.2 NO. 61010-2-201  |

### Back-up of real-time clock

|                                       |  |       |  |
|---------------------------------------|--|-------|--|
| Back-up of real-time clock            |  |       |  <p>① Backup time (hours) with fully charged double layer capacitor<br/>② Service life (years)</p> |
| Accuracy of real-time clock to inputs |  | s/day | typ. $\pm 2$ ( $\pm 0.2$ h/Year)<br><br>depending on ambient air temperature fluctuations of up to $\pm 5$ s/day ( $\pm 0.5$ h/year) are possible                                      |

### Repetition accuracy of timing relays

|                                       |  |     |            |
|---------------------------------------|--|-----|------------|
| Accuracy of timing relays (of values) |  | %   | $\pm 0.02$ |
| Resolution                            |  |     |            |
| Range "S"                             |  | ms  | 5          |
| Range "M:S"                           |  | s   | 1          |
| Range "H:M"                           |  | min | 1          |

### Power supply

|                             |       |    |                     |
|-----------------------------|-------|----|---------------------|
| Rated operational voltage   | $U_e$ | V  | 24 DC (-15/+20%)    |
| Permissible range           | $U_e$ |    | 20.4 - 28.8 V DC    |
| Residual ripple             |       | %  | $\leq 5$            |
| Siemens MPI, (optional)     |       |    | yes                 |
| Input current               |       |    | max. 80 mA at $U_e$ |
| Voltage dips                |       | ms | $\leq 10$           |
| Fuse                        |       | A  | $\geq 1A$ (T)       |
| Heat dissipation at 24 V DC |       | W  | 2                   |

### Digital inputs 24 V DC

|        |  |  |   |
|--------|--|--|---|
| Number |  |  | 8 |
|--------|--|--|---|

|                                     |                |      |   |
|-------------------------------------|----------------|------|---|
| Inputs can be used as analog inputs |                |      | 4 (I5, I6, I7, I8)  |
| Status Display                      |                |      | LCD-Display   |
| Potential isolation                 |                |      | from power supply: no<br>to the memory card: no<br>to Ethernet: yes<br>between inputs: no<br>from the outputs: yes<br>to expansion devices: yes |
| Rated operational voltage           | U <sub>e</sub> | V DC | 24  |
| Input voltage                       |                | V DC | Signal 0: ≤ 5 (I1 - I8)<br>Condition 1: ≥ 15 (I1 - I8)  |
| Input current at signal 1           |                | mA   | 3.3 (I1 - I4)<br>1.8 (I5 - I8)  |
| Deceleration time                   |                | ms   | 20 (0 -> 1/1 -> 0, Debounce ON)<br>type 0.015 (0 -> 1/1 -> 0, Debounce OFF)   |
| Cable length                        |                | m    | 100 (unshielded)  |
| Frequency counter                   |                |      |   |
| Number                              |                |      | 4 (I1, I2, I3, I4)  |
| Counter frequency                   |                | kHz  | ≤ 10  |
| Pulse shape                         |                |      | Square  |
| Pulse pause ratio                   |                |      | 1:1   |
| Cable length                        |                | m    | ≤ 20 (screened)   |
| Incremental counter                 |                |      |   |
| Number of counter inputs            |                |      | 2 (I1 + I2, I3 + I4)  |
| Value range                         |                |      | -2147483648 to +2147483647  |
| Counter frequency                   |                | kHz  | ≤ 10  |
| Pulse shape                         |                |      | Square  |
| Signal offset                       |                |      | 90°   |
| Pulse pause ratio                   |                |      | 1:1   |
| Cable length                        |                | m    | ≤ 20 (screened)   |
| Rapid counter inputs                |                |      |   |
| Number                              |                |      | 4 (I1, I2, I3, I4)  |
| Value range                         |                |      | -2147483648 to +2147483647  |
| Counter frequency                   |                | kHz  | ≤ 10  |
| Pulse shape                         |                |      | Square  |
| Pulse pause ratio                   |                |      | 1:1   |
| Cable length                        |                | m    | ≤ 20 (screened)   |

### Analog inputs

|                                 |  |    |   |
|---------------------------------|--|----|---|
| Number                          |  |    | 4 (I5, I6, I7, I8)  |
| Potential isolation             |  |    | from power supply: no<br>to the memory card: no<br>to Ethernet: yes<br>between inputs: no<br>from the outputs: yes<br>to expansion devices: yes |
| Input type                      |  |    | DC voltage  |
| Signal range                    |  |    | 0-10 V DC   |
| Resolution                      |  |    | 12 Bit (value 0 - 4095)   |
| Input impedance                 |  | kΩ | 13.3  |
| Accuracy of actual value        |  |    |   |
| two devices from series         |  | %  | ± 3, ± 0.12 V   |
| Within a single device          |  | %  | ± 2, ± 0.12 V   |
| Conversion time, analog/digital |  | ms | each CPU cycle  |
| Input current                   |  | mA | < 1   |
| Cable length                    |  | m  | ≤ 30, screened  |

### Transistor outputs

|                           |                |      |                  |
|---------------------------|----------------|------|------------------|
| Number                    |                |      | 4                |
| Rated operational voltage | U <sub>e</sub> | V DC | 24               |
| Permissible range         | U <sub>e</sub> |      | 20.4 - 28.8 V DC |
| Residual ripple           |                | %    | 5                |
| Supply current            |                | mA   | Norm./max. 15    |

|  |       |      |  |
|--|-------|------|--|
| Siemens MPI, (optional)  |       |      | Yes (Caution: A short circuit will occur if a supply voltage of the wrong polarity is applied to the outputs.)   |
| Potential isolation  |       |      | from power supply: yes<br>to the memory card: yes<br>to Ethernet: yes<br>From the inputs: yes<br>to control buttons: yes<br>between the outputs: no<br>to expansion devices: yes |
| Rated operational current at signal „1“ DC per channel   | $I_e$ | A    | Max. 0.5   |
| Residual current on 0 signal per channel   |       | mA   | < 0.005  |
| Max. output voltage  |       | V    | 1 (at status 0 per channel)<br>$U = U_e - 1 \text{ V}$ (signal 1 at $I_e = 0.5 \text{ A}$ )  |
| Short-circuit protection   |       |      | yes, electronic (Q1 - Q4)  |
| Short-circuit tripping current for $R_a \leq 10 \text{ m}\Omega$                                 |       | A    | $0.7 \leq I_e \leq 1.7$ per output<br>depending on number of active channels and their load  |
| Total short-circuit current  |       | A    | 6.8  |
| Thermal cutout   |       |      | Yes  |
| Max. operating frequency with constant resistive load  |       |      | Operation abhängig von der Zykluszeit des Basisgeräts und bei Erweiterungsgeräten auch von deren Übertragungszeit  |
| Parallel connection of outputs   |       |      |  |
| With resistive load, inductive load with external suppressor circuit, combination within a group |       |      | Group 1: Q1 to Q4  |
| Number of outputs  | max.  |      | 4  |
| Max. total current   |       | A    | 2  |
| Output status indication   |       |      | LCD-display  |
| Inductive load to EN 60947-5-1   |       |      |  |
| Without external suppressor circuit  |       |      |  |
| DC-13, $T_{0.95} = 72 \text{ ms}$ , $R = 48 \Omega$ , $L = 1.15 \text{ H}$                       |       |      |  |
| Utilization factor   |       | g    | 0.25   |
| Duty factor  |       | % DF | 100  |
| $T_{0.95} = 15 \text{ ms}$ , $R = 48 \Omega$ , $L = 0.24 \text{ H}$                              |       |      |  |
| Utilization factor   |       | g    | 0.25   |
| Duty factor  |       | % DF | 100  |
| With external suppressor circuit   |       |      |  |
| Utilization factor   |       | g    | 1  |
| Duty factor  |       | % DF | 100  |
| Max. switching frequency, max. duty factor   |       |      | Operation depending on the suppressor circuit  |

## Ethernet

|                    |  |        |                  |
|--------------------|--|--------|------------------|
| Data transfer rate |  | Mbit/s | 10/100           |
| Connections        |  |        | RJ45 plug, 8-pin |
| Cable              |  |        | CAT5             |

## Design verification as per IEC/EN 61439

|  |          |    |  |
|--|----------|----|--|
| Technical data for design verification   |          |    |  |
| Static heat dissipation, non-current-dependent   | $P_{vs}$ | W  | 2  |
| Operating ambient temperature min.   |          | °C | -25  |
| Operating ambient temperature max.   |          | °C | 55   |
| IEC/EN 61439 design verification   |          |    |  |
| 10.2 Strength of materials and parts   |          |    |  |
| 10.2.2 Corrosion resistance  |          |    |  |
|  |          |    | Meets the product standard's requirements.                         |
| 10.2.3.1 Verification of thermal stability of enclosures   |          |    |  |
|  |          |    | Meets the product standard's requirements.                         |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |          |    |  |
|  |          |    | Meets the product standard's requirements.                         |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |          |    |  |
|  |          |    | Meets the product standard's requirements.                         |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |          |    |  |
|  |          |    | Meets the product standard's requirements.                         |
| 10.2.5 Lifting   |          |    |  |
|  |          |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact   |          |    |  |
|  |          |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions  |          |    |  |
|  |          |    | Meets the product standard's requirements.                         |
| 10.3 Degree of protection of ASSEMBLIES  |          |    |  |
|  |          |    | Meets the product standard's requirements.                         |

|  |  |  |
|--|--|--|
| 10.4 Clearances and creepage distances                   |  | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock                   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections        |  | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors                 |  | Is the panel builder's responsibility.   |
| 10.9 Insulation properties                               |  |  |
| 10.9.2 Power-frequency electric strength                 |  | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage                         |  | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material |  | Is the panel builder's responsibility.   |
| 10.10 Temperature rise                                   |  | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating                               |  | Is the panel builder's responsibility.   |
| 10.12 Electromagnetic compatibility                      |  | Is the panel builder's responsibility.   |
| 10.13 Mechanical function                                |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0


|  |   |             |
|--|---|-------------|
| PLC's (EG000024) / Logic module (EC001417)   |   |             |
| Electric engineering, automation, process control engineering / Control / Programmable logic control (SPS) / Logic module (ecl@ss10.0.1-27-24-22-16 [AKE539014]) |   |             |
| Supply voltage AC 50 Hz  | V | 0 - 0       |
| Supply voltage AC 60 Hz  | V | 0 - 0       |
| Supply voltage DC  | V | 20.4 - 28.8 |
| Voltage type of supply voltage   |   | DC          |
| Voltage type of supply voltage   |   | DC          |
| Switching current  | A | 0.5         |
| Number of analogue inputs  |   | 4           |
| Number of analogue outputs   |   | 0           |
| Number of digital inputs   |   | 8           |
| Number of digital outputs  |   | 4           |
| With relay output  |   | No          |
| Number of HW-interfaces industrial Ethernet  |   | 1           |
| Number of interfaces PROFINET  |   | 0           |
| Number of HW-interfaces RS-232   |   | 0           |
| Number of HW-interfaces RS-422   |   | 0           |
| Number of HW-interfaces RS-485   |   | 0           |
| Number of HW-interfaces serial TTY   |   | 0           |
| Number of HW-interfaces USB  |   | 0           |
| Number of HW-interfaces parallel   |   | 0           |
| Number of HW-interfaces Wireless   |   | 0           |
| Number of HW-interfaces other  |   | 1           |
| With optical interface   |   | No          |
| Supporting protocol for TCP/IP   |   | Yes         |
| Supporting protocol for PROFIBUS   |   | No          |
| Supporting protocol for CAN  |   | No          |
| Supporting protocol for INTERBUS   |   | No          |
| Supporting protocol for ASI  |   | No          |
| Supporting protocol for KNX  |   | No          |
| Supporting protocol for MODBUS   |   | Yes         |
| Supporting protocol for Data-Highway   |   | No          |
| Supporting protocol for DeviceNet  |   | No          |
| Supporting protocol for SUCONET  |   | No          |
| Supporting protocol for LON  |   | No          |
| Supporting protocol for PROFINET IO  |   | No          |
| Supporting protocol for PROFINET CBA   |   | No          |
| Supporting protocol for SERCOS   |   | No          |
| Supporting protocol for Foundation Fieldbus  |   | No          |

|   |    |      |
|---|----|------|
| Supporting protocol for EtherNet/IP                 |    | No   |
| Supporting protocol for AS-Interface Safety at Work |    | No   |
| Supporting protocol for DeviceNet Safety            |    | No   |
| Supporting protocol for INTERBUS-Safety             |    | No   |
| Supporting protocol for PROFIsafe                   |    | No   |
| Supporting protocol for SafetyBUS p                 |    | No   |
| Supporting protocol for other bus systems           |    | No   |
| Radio standard Bluetooth                            |    | No   |
| Radio standard WLAN 802.11                          |    | No   |
| Radio standard GPRS                                 |    | No   |
| Radio standard GSM                                  |    | No   |
| Radio standard UMTS                                 |    | No   |
| IO link master                                      |    | No   |
| Redundancy  |    | No   |
| With display  |    | Yes  |
| Degree of protection (IP)                           |    | IP20 |
| Basic device  |    | Yes  |
| Expandable  |    | Yes  |
| Expansion device                                    |    | No   |
| With timer  |    | Yes  |
| Rail mounting possible                              |    | Yes  |
| Wall mounting/direct mounting                       |    | Yes  |
| Front build in possible                             |    | Yes  |
| Rack-assembly possible                              |    | No   |
| Suitable for safety functions                       |    | No   |
| Category according to EN 954-1                      |    | -    |
| SIL according to IEC 61508                          |    | None |
| Performance level acc. EN ISO 13849-1               |    | None |
| Appendant operation agent (Ex ia)                   |    | No   |
| Appendant operation agent (Ex ib)                   |    | No   |
| Explosion safety category for gas                   |    | None |
| Explosion safety category for dust                  |    | None |
| Width   | mm | 71.5 |
| Height  | mm | 90   |
| Depth   | mm | 58   |

## Approvals

|                      |  |                           |
|----------------------|--|---------------------------|
| Degree of Protection |  | IEC: IP20, UL/CSA Type: - |
|----------------------|--|---------------------------|

## Dimensions

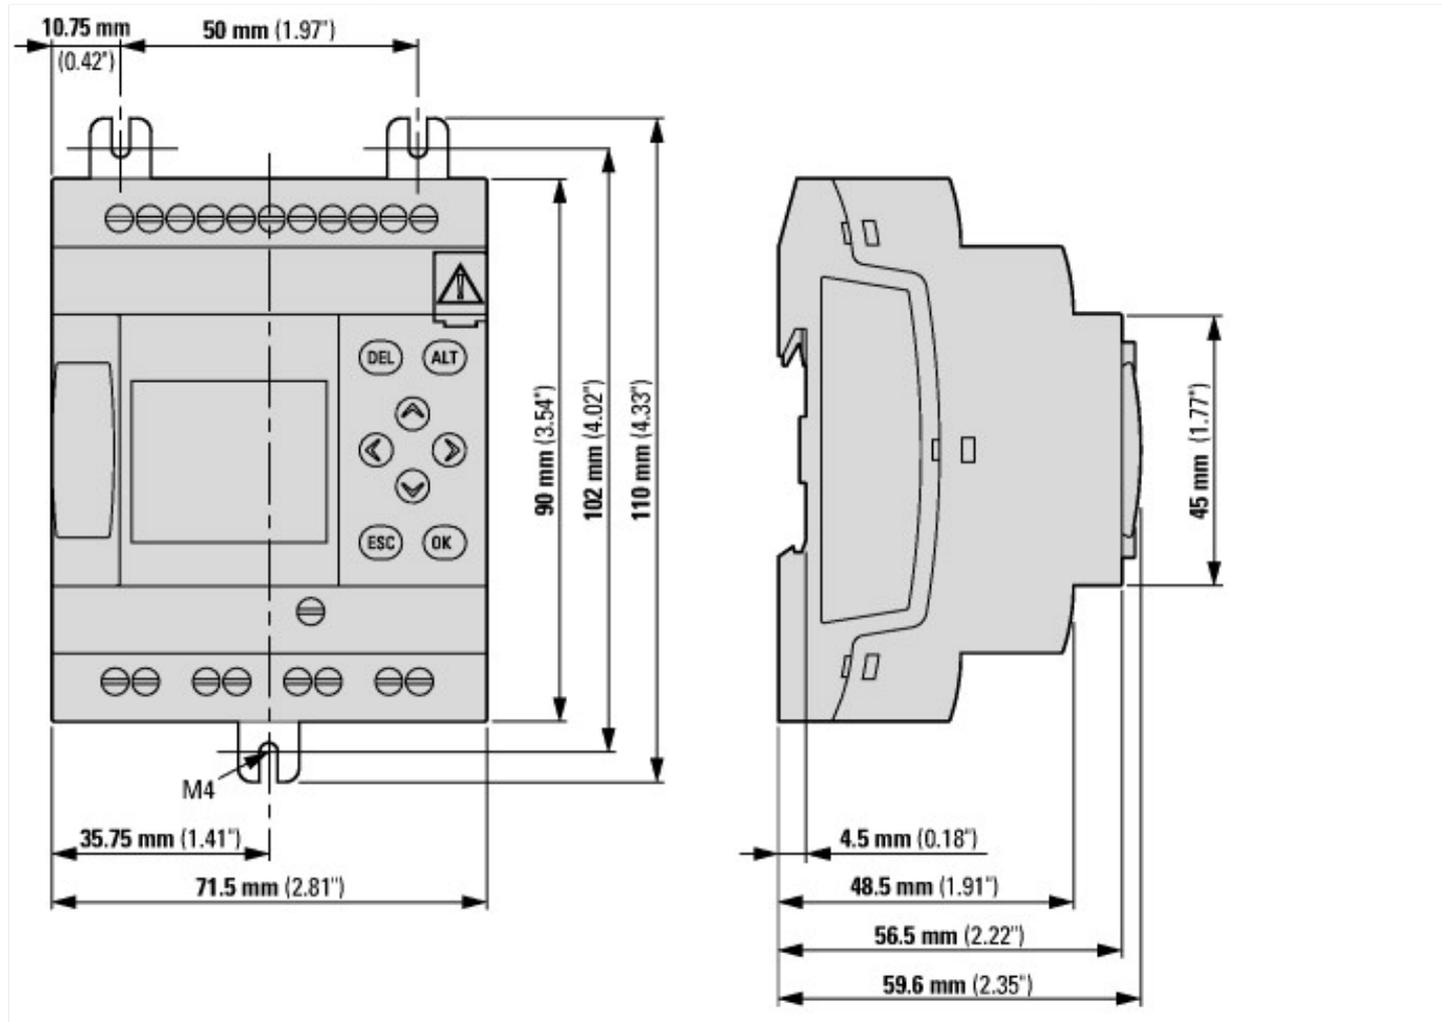

## Assets (links)

### Declaration of CE Conformity

00003209

## Additional product information (links)

|  |   |
|--|---|
| <b>assembly instructions easyE4 IL050020ZU</b> |   |
| assembly instructions easyE4 IL050020ZU        | <a href="ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL050020ZU2019_02.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL050020ZU2019_02.pdf</a> |
| <b>easyE4 (MN050009) manual</b>                |   |
| easyE4 – Handbuch (MN050009) - Deutsch         | <a href="ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050009_DE.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050009_DE.pdf</a>                       |
| easyE4 (MN050009) manual - English             | <a href="ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050009_EN.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050009_EN.pdf</a>                       |
| Manuale easy E4 (MN050009) - italiano          | <a href="ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050009_IT.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050009_IT.pdf</a>                       |
| instrukcja easyE4 (MN050009) - polski          | <a href="ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050009_PL.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050009_PL.pdf</a>                       |