DATASHEET - DILA-XHIC11



Auxiliary contact module, 1N/0+1N/C, surface mounting, spring clamp connection



Part no. DILA-XHIC11
Catalog No. 276527
Eaton Catalog No. XTCEXFACC11
EL-Nummer 0004110268
(Norway)

Delivery program

Delivery program			
Accessories			Auxiliary contact modules
Description			with interlocked opposing contacts Switching elements according to EN 50005 Version E combinations correspond to EN 50011 and are to be preferred. The DC operated contactor DILA(C)-22 must only be combined with 2-pole auxiliary contacts.
Function			for standard applications
Number of poles			2 pole
Connection technique			Spring-loaded terminals
Rated operational current			
Conventional free air thermal current, 1 pole			
Open			
at 60 °C	I _{th}	Α	16
AC-15			
220 V 230 V 240 V	I _e	Α	4
380 V 400 V 415 V	I _e	Α	4
Contacts			
N/0 = Normally open			1 N/0
N/C = Normally closed			1 NC
Mounting type			Front fixing
Contact sequence			53 <u>6</u> 1
For use with Type			DILA(C) DILM(C)7 DILM(C)9 DILM(C)12 DILM(C)15 DILM(C)15 DILM(C)25 DILM(C)32 DILM38 DILM920 DILM920 DILMP45 DILMP45 DILL DILMF11 DILMF14 DILMF14 DILMF17 DILMF155 DILMF25 DILMF32 Front mounting auxiliary contact
Instructions			Interlocked opposing contacts according to IEC/EN 60947-5-1 appendix L, inside the auxiliary contact modules, also for the integrated auxiliary contacts of the DILM 7 - DILM32 Auxiliary contacts used as mirror contacts according to IEC/EN 60947-4-1 Appendix F (not N/C late open)
Code number and version of combination			
Distinctive number			51E
with basic device			DILA(C)-40
			42
with basic device			DILA(C)-31

	3	33
with basic device	D	DILA(C)-22

Technical data

Electrical specifications for standard auxiliary contacts

Control circuit cables			
Tool			
Solid or stranded		AWG	18 – 14
Flexible with ferrule		mm ²	1 x (0.75 - 1.5) 2 x (0.75 - 1.5)
Solid		mm ²	1 x (0.75 - 2.5) 2 x (0.75 - 2.5)
Terminal capacity control circuit cables			
max. fuse		A gG/gL	10
Short-circuit rating without welding			
at $U_e = 230 \text{ V, AC-}15, 3 \text{ A}$	Operations	x 10 ⁶	1.3
Component lifespan			
Control circuit reliability	Failure rate	λ	$<10^{-8}$, $<$ one failure at 100 million operations (at $U_e = 24 \text{ V DC}$, $U_{min} = 17 \text{ V}$, $I_{min} = 5.4 \text{ mA}$)
220 V	l _e	Α	0.25
110 V	l _e	Α	0.5
60 V	l _e	Α	1
24 V	l _e	A	2.5
DC-13 (6xP)			
3	220 V	Α	0.25
3	110 V	Α	0.5
3	60 V	Α	1
3	24 V	Α	2.5
DC L/R ≤ 50 ms			
3	220 V	Α	5
1	220 V	Α	1
3	110 V	Α	6
1	110 V	Α	3
2	60 V	Α	10
1	60 V	A	6
1	24 V	A	10
Contacts in series:		A	
DC L/R ≦ 15 ms			
DC current	l _e	^	1.00
500 V 400 V 413 V		A	1.5
380 V 400 V 415 V	l _e	A	4
AC-15 220 V 230 V 240 V	1	A	4
at 60 °C	I _{th}	Α	16
Open		٨	16
Conventional free air thermal current, 1 pole			
Rated operational current		Α	
between the auxiliary contacts		V AC	400
between coil and auxiliary contacts		V AC	400
Safe isolation to EN 61140			
Rated operational voltage	U _e	V AC	500
Rated insulation voltage	U_{i}	V AC	690
Overvoltage category/pollution degree			III/3
N/C contact (not late-break contact) suitable as a mirror contact (to IEC/EN 60947-4-1 Annex F)			DILM7 - DILM32
Interlocked opposing contacts within an auxiliary contact module (to IEC 60947-5- Annex L)	1		Yes
leterical specifications for Standard auxiliary contacts	1		V

Standard screwdriver	mm	0.6 x 3.5
	111111	0.0 X 3.3
Rating data for approved types		
Auxiliary contacts		
Pilot Duty		
AC operated		A600
DC operated		P300
General Use		
AC	V	600
AC	Α	10
DC	V	250
DC	А	1

Design verification as per IEC/EN 61439

2001gii 1011110411011 40 poi 120, 211 01 100			
Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	4
Heat dissipation per pole, current-dependent	P _{vid}	W	0.16
Equipment heat dissipation, current-dependent	P _{vid}	W	0
Static heat dissipation, non-current-dependent	P _{vs}	W	0
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	60
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Auxiliary contact block (EC000041)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Auxiliary switch block (ecl@ss10.0.1-27-37-13-02 [AKN342013])


(ecl@ss10.0.1-27-37-13-02 [AKN342013])		
Number of contacts as change-over contact	0	
Number of contacts as normally open contact	1	


Number of contacts as normally closed contact		1
Number of fault-signal switches		0
Rated operation current le at AC-15, 230 V	Α	4
Type of electric connection		Spring clamp connection
Model		Top mounting
Mounting method		Front fastening
Lamp holder		None

Approvals

Product Standards	IEC/EN 60947-4-1; UL 508; CSA-C22.2 No. 14-05; CE marking
UL File No.	E29184
UL Category Control No.	NKCR
CSA File No.	012528
CSA Class No.	3211-03
North America Certification	UL listed, CSA certified
Specially designed for North America	No

Dimensions

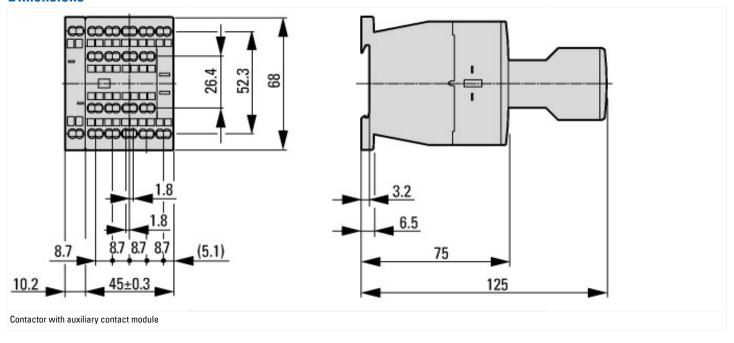

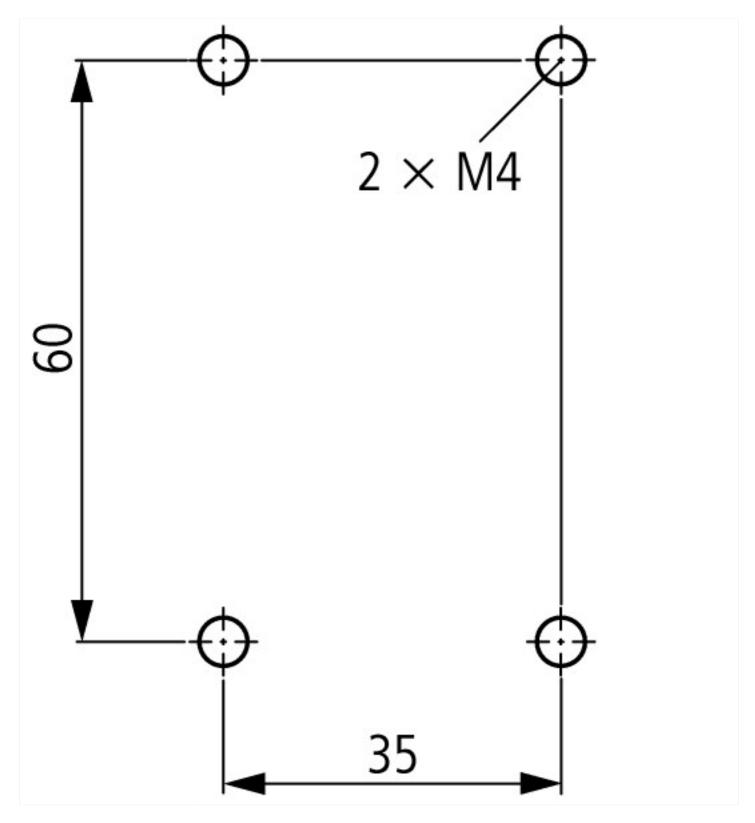

Additional product information (links)

IL03407013Z (AWA2100-2126) Contactors	
IL03407013Z (AWA2100-2126) Contactors	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407013Z2018_07.pdf
Motor starters and "Special Purpose Ratings" for the North American market	http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf
Switchgear of Power Factor Correction Systems	http://www.moeller.net/binary/ver_techpapers/ver934en.pdf
X-Start - Modern Switching Installations Efficiently Fitted and Wired Securely	http://www.moeller.net/binary/ver_techpapers/ver938en.pdf
Mirror Contacts for Highly-Reliable Information Relating to Safety-Related Control Functions	http://www.moeller.net/binary/ver_techpapers/ver944en.pdf
Effect of the Cabel Capacitance of Long Control Cables on the Actuation of Contactors	http://www.moeller.net/binary/ver_techpapers/ver949en.pdf
Switchgear for Luminaires	http://www.moeller.net/binary/ver_techpapers/ver955en.pdf

Eaton 276527 ED2019 V52.0 EN

Standard Compliant and Functionally Safe Engineering Design with Mechanical Auxiliary Contacts	http://www.moeller.net/binary/ver_techpapers/ver956en.pdf
The Interaction of Contactors with PLCs	http://www.moeller.net/binary/ver_techpapers/ver957en.pdf
Busbar Component Adapters for modern Industrial control panels	http://www.moeller.net/binary/ver_techpapers/ver960en.pdf